




Structodek® High Density

with Primed Red Coating



PRODUCT DATA SHEET

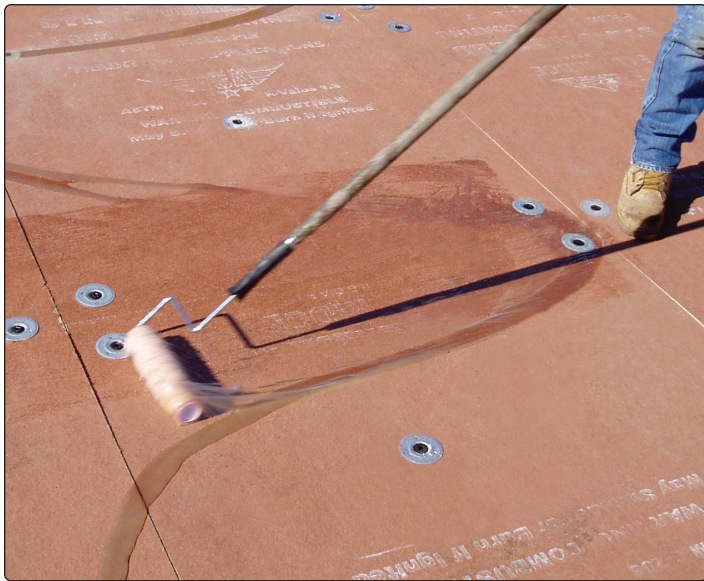

DESCRIPTION

The proprietary, patented, non-asphaltic Primed Red Coating integrated on the surface of STRUCTODEK HD possesses unique bonding characteristics that ultimately result in superior adhesion capabilities with the current membrane & adhesive technology on the market today. The nonasphaltic Primed Red Coating is compatible with all single-ply membranes including PVC, TPO, EPDM, and CSPE without concern of premature membrane degradation that is often associated with asphalt emulsion coated fiberboard products. Additionally, the Primed Red Coating, unlike asphalt emulsion coated products, has proven to be compatible with traditional, low-VOC and water-based adhesives as well as many foam adhesives. The Primed Red Coating allows adhesives & foams to “key” into the STRUCTODEK HD surface while at the same time deterring excessive adhesive absorption. The unique Primed Red Coating allows for a solid membrane bond while still providing optimal square foot per gallon of adhesive coverage thus insuring a quality & cost effective membrane installation.

While STRUCTODEK HD WITH PRIMED RED COATING was designed with the single-ply application in mind, it is compatible with traditional roofing applications such as BUR and cold-applied systems as well. Additionally, STRUCTODEK HD WITH PRIMED RED COATING has also been successful in peel-and-stick applications without the typical need for an additional primer in many instances. The rigid and strong, yet lightweight nature of STRUCTODEK HD WITH PRIMED RED COATING is better than heavier alternatives and will keep the roof load below the specified maximum weight. STRUCTODEK HD WITH PRIMED RED COATING is offered coated on two sides and available in 4'x4' and 4'x8' panels.

BASIC USES

STRUCTODEK HD WITH PRIMED RED COATING can be used as an insulation board, cover board, or re-roof/recover board. The product is a high-density roofing board designed for low-slope single-ply, as well as traditional roof system applications.

TYPICAL PHYSICAL PROPERTIES

Physical Properties	1/2" Thickness Value
Transverse Strength, Lbf	12-14
Weight, lb/ft ² (nominal)	0.7
Tensile Strength Parallel, min, lbf/in ²	150
Tensile Strength Perpendicular, min, lbf/ft ²	600
Water Absorption by Volume, max, %	7
Moisture Content by Weight, max, %	10
Linear Expansion 50-90% RH, max, %	0.5
Modulus of Rupture, min, lbf/in ²	275
Deflection at Specified Min. Load, max, in.	0.75
Flute Spanability, max width, in.	1-5/8
Compressive Strength, min, lbf/in ²	15
R-Value, ft ² • h • °F/BTU in	1.3

BENEFITS AND SUPPLEMENTAL STATEMENTS

- Compatible with PVC, TPO, EPDM, CSPE single-ply membranes as well as more traditional systems.
- Compatible with most low-VOC, water-based and traditional adhesives.
- Superior adhesion without excess adhesive absorption.
- Compatible with most direct peel-and-stick applications.
- BUR compatible - easily handles hot asphalt.
- Approved in thousands of FM RoofNav® & UL Class A and Class 1 rated roof system assemblies.
- Green, non-asphaltic coating – contributes to LEED credits.
- Hail-resistant, structurally rigid, easily handles heavy foot traffic and wheeled loads.
- Possesses SOUNDSTOP® sound deadening technology.
- Contributes to thermal insulation with R-values of 1.3 per 1/2".
- Lightweight, fiberglass free, cuts with a standard utility knife.
- Compressive strength of 22 psi @ 10% deformation and 45 psi @ 20% deformation.
- Coated 2 sides Primed Red provides optimal surface bonding characteristics ideal for use in single and multi-ply roof systems.
- Waxes & other moisture-resistant components are added early in the manufacturing process providing superior core and edge protection. The integral moisture-resistant components protect the edges in stock panel size (4'x4' or 4'x8') and, more importantly, also protects the edges when the product is cut on the job site.
- Cost effective solution - a value engineered champion.



Structodek® High Density

with Primed Red Coating

PRODUCT DATA SHEET



CODE APPROVALS/COMPLIANCE

- ASTM C208, Type II, Grade 1 and Grade 2
- Federal Specification LLL-I-535 Superseded by ASTM C208
- CAN/ULC-S706-09 Type II, Classes 1 and 2
- UL Classified, Std UL 790
- ULC Classified, Std CAN/ULC-S107
- FM Approved Class 1 - FM Approved Standard 4450/4470
- DORA Listed RCM ID #689
- Canadian Evaluation CCMC #13186-L
- Florida Building Code Product Approval FL #13792.1
- Miami-Dade County, Florida, NOA No. 23-0623.03, Expiration Date 09/18/28

PRECAUTIONS

Do not expose to open flame or excessive heat. May smoulder if ignited. If ignited, extinguish completely. Do not apply flame directly to material when installing a modified bitumen system. Material must be kept dry at all times; in storage and during application. Apply only as much STRUCTODEK HD WITH PRIMED RED COATING in one day as can be covered by completed roofing system that day. Do not use as an underlayment for shingles. In re-roofing applications, all wet areas in old roof should be cut out and replaced. Before material is installed, remove all loose and protruding gravel. STRUCTODEK HD WITH PRIMED RED COATING must not be used in close proximity to chimneys, heater units, fireplaces, steam pipes, or other surfaces which could provide longterm exposure to excessive heat (over 212° F) without adequate thermal protection. Consult appropriate heating appliance manufacturer's instructions before installation.

Fastening Patterns: Fastening patterns will vary based upon specific membrane manufacturers' assemblies. Please refer to membrane manufacturer fastening requirements.

MANUFACTURED BY:



DISCLAIMER

The statements provided concerning the material shown are intended as a guide for material usage and are believed to be true and accurate at the time of printing. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. Since the manner of use is beyond our control, Mule-Hide does not authorize anyone to make any warranty of merchantability or fitness for any particular purpose or any other warranty, guarantee or representation, expressed or implied, concerning this material. This product may be eligible for a Mule-Hide warranty, please check the Mule-Hide website at www.mulehide.com or contact Mule-Hide directly at 800-786-1492 for details. Buyer and user accept the product under these conditions and assume the risk of any failure, any injury person or property (including that of the user), loss or liability resulting from the handling, storage or use of the product whether or not it is handled, stored or used in accordance with the directions or specifications. Mule-Hide must be notified in writing of any claims and be given the opportunity to inspect the alleged failure before repairs are made