




COPING

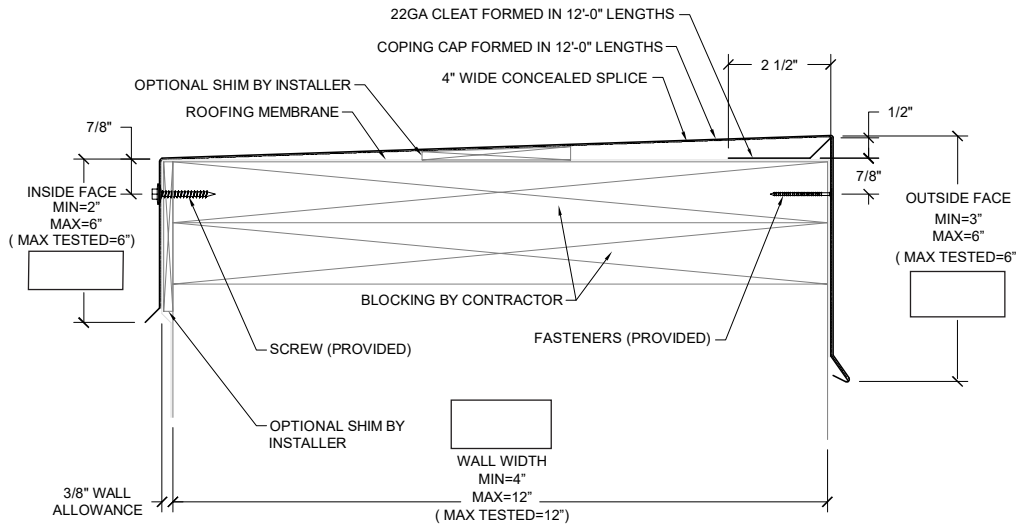


VERSIONS

TAPERED

SUBSTRATE CONDITION SHOWN ON DRAWING


FLAT

SUBSTRATE CONDITION



EXISTING SLOPE

SUBSTRATE CONDITION

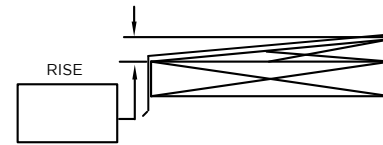

* NOTES

- Unless otherwise noted, fabrication of miters and accessories are furnished standard utilizing a non-penetrating quicklock joint, then factory sealed watertight.
- Welded accessories require a minimum material thickness of .050"
- For non-90 miters, see separate print approval
- Provided splice plates must be field caulked to prevent water entry
- Product should be installed per provided installation instructions
- ANSI/SPRI/FM 4435/ES-1 test pressures up to 61 psf (Horizontal) and 103 psf (Vertical)

PROJECT INFO

Project Name: _____

Architect: _____

Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Mule-Hide Products
1195 Prince Hall Drive
Beloit, WI 53511
800-786-1492
www.mulehide.com

To submit a quote request, please contact your local TM or email mhquotes@metalera.com.

SHT# _____ of _____

DATE: **03/21/24**

DRN BY: **PL**

CKD BY: **MM**

DWG #: 52011-42331

REV: **A**

APPROVALS*

ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

MATERIAL*

- | | |
|---|---|
| <input type="checkbox"/> 24 Ga. Galv. Steel | <input type="checkbox"/> .040" Aluminum |
| <input type="checkbox"/> 22 Ga. Galv. Steel | <input type="checkbox"/> .050" Aluminum |
| <input type="checkbox"/> OTHER: _____ | <input type="checkbox"/> .063" Aluminum |

Substrate: Wood Masonry Metal
If substrate is not given, wood fasteners will be provided.

Color: _____

Finish: _____

QUANTITIES

- | |
|---|
| _____ Right Endwall Flashing (Coping Version) |
| _____ Lineal Feet (12'-0" Lengths) |
| _____ Left Endwall Flashing (Coping Version) |
| _____ Outside Miter (90°) |
| _____ Outside Transition Miter |
| _____ Inside Miter (90°) |
| _____ Inside Transition Miter |
| _____ Right Endcaps |
| _____ Right Straight Transition Miter |
| _____ Left Endcaps |
| _____ Left Straight Transition Miter |

FILL OUT TRANSITION MITER MEASUREMENTS ON PAGE 2

VERSIONS

- Tapered
 Flat
 Existing Slope

ACCESSORY TYPE*

- Quicklock (Default)
 Welded (Surcharge)



COPING


MITER STANDARD LEG LENGTH= WALL SIZE + 9 7/16"

PLEASE SPECIFY QUANTITIES FOR ALL ACCESORIES ON PAGE 1

STRAIGHT TRANSITION MITERS


FOR TAPERED AND FLAT VERSIONS (RIGHT) FOR TAPERED AND FLAT VERSIONS (LEFT)

PLEASE INDICATE SLOPE BY CIRCLING APPROPRIATE OUTSIDE FACE.

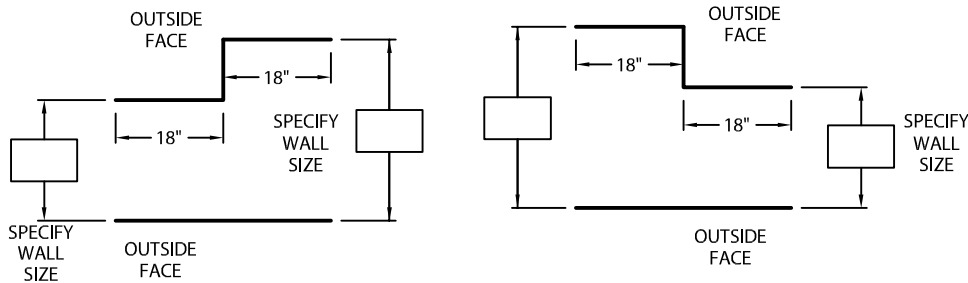


EXISTING SLOPE VERSION (RIGHT)

FOR EXISTING SLOPE VERSION (LEFT)

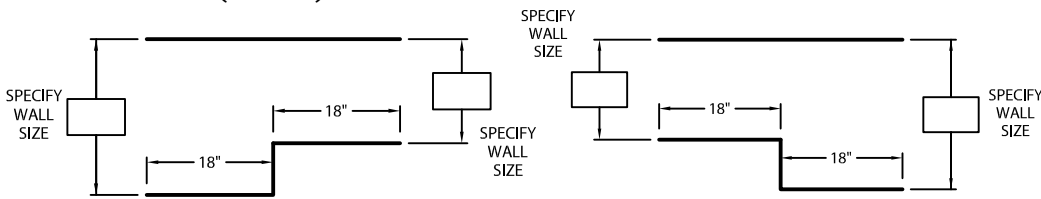


PLEASE SPECIFY ELEVATION/SLOPE CONDITION

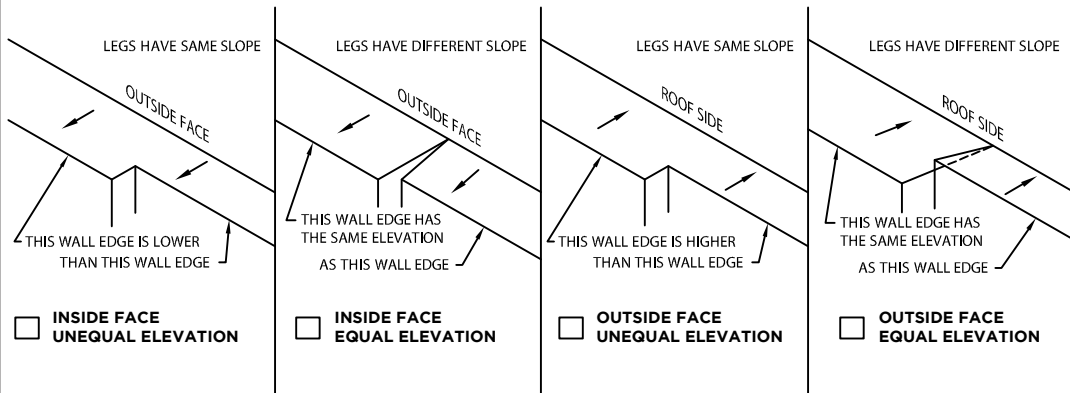

TRANSITION MITERS

OUTSIDE



INSIDE

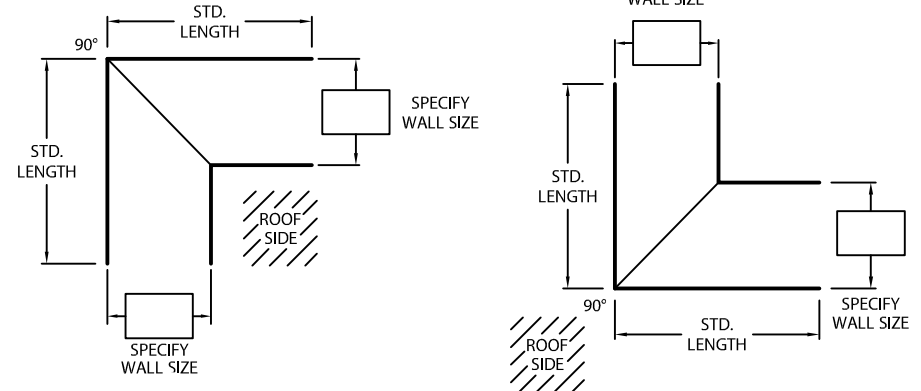

STANDARD ACCESSORIES



OUTSIDE MITER

INSIDE MITER

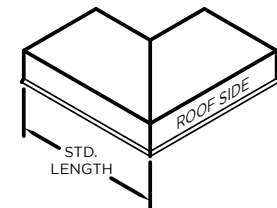

ENDCAP (LEFT HAND SHOWN)

ENDWALL FLASHING COPING VERSION (RIGHT HAND SHOWN)



SHT# ____ of ____
 DATE: **03/21/24**
 DRN BY: **JJC**
 CKD BY: **MM**
 DWG #: 52011-42331
 REV: **A**