




# GRAVEL STOP

PVC COATED


## NOTES

- With Cleat-
- All cleats provided in 12'-0" lengths
  - All covers provided in 10'-0" lengths
  - No lap notches or splice plates provided
  - For non-90 miters, see separate print approval
  - Product should be installed per provided installation instructions
  - ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 258 psf

### FACE HEIGHT 6" OR LESS

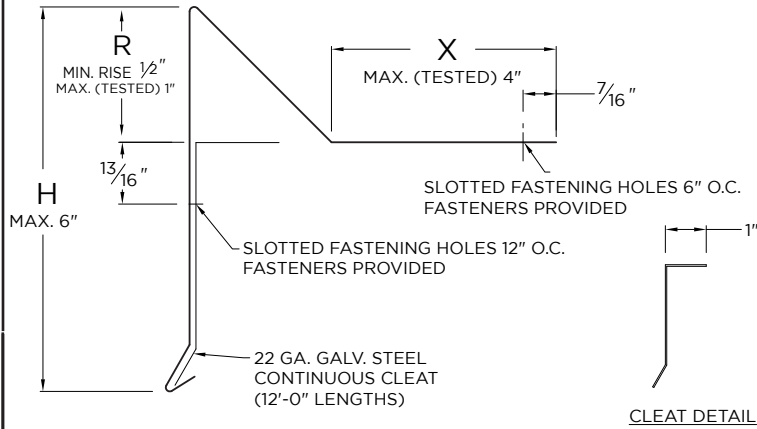

### FACE HEIGHT OVER 6"

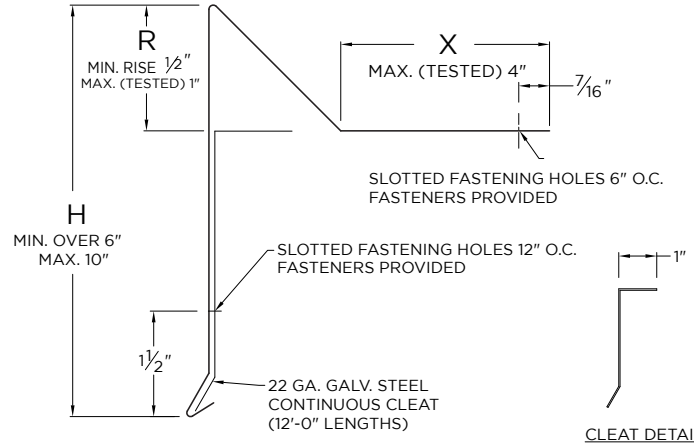

## APPROVALS

**ANSI/SPRI/FM 4435/ES-1**  
Test Pressures listed in notes

## PROJECT INFO

Project Name: \_\_\_\_\_

Architect: \_\_\_\_\_

Roofing Contractor: \_\_\_\_\_

### Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: \_\_\_\_\_

**Mule-Hide Products**  
1195 Prince Hall Drive  
Beloit, WI 53511  
800-786-1492  
www.mulehide.com

To submit a quote request, please contact your local TM or email [mhquotes@metalera.com](mailto:mhquotes@metalera.com).

SHT# \_\_\_\_\_ of \_\_\_\_\_

DATE: **03/21/ 24**

DRN BY: **JJC**

CKD BY: **MM**

DWG #: 52010-42318

REV: **A**

## DIMENSIONS

\_\_\_\_\_ (H) Face Height

\_\_\_\_\_ (X) Flange Size

\_\_\_\_\_ (R) Rise

## MATERIAL

24 ga. Galv Steel PVC Coated

**Color:** White

**Substrate:**  Wood

If substrate is not given, wood fasteners  Masonry

will be provided.  Metal

## QUANTITIES

\_\_\_\_\_ Lineal Feet (10'-0" Lengths)

\_\_\_\_\_ Outside Miter (90°)

\_\_\_\_\_ Inside Miter (90°)