




GRAVEL STOP

TPO COATED


NOTES

- With Cleat-
- All cleats provided in 12'-0" lengths
 - All covers provided in 12'-0" lengths
 - No lap notches or splice plates provided
 - For non-90 miters, see separate print approval
 - Product should be installed per provided installation instructions
 - ANSI/SPRI/FM 4435/ES-1 Test Pressure up to 258 psf

FACE HEIGHT 6" OR LESS

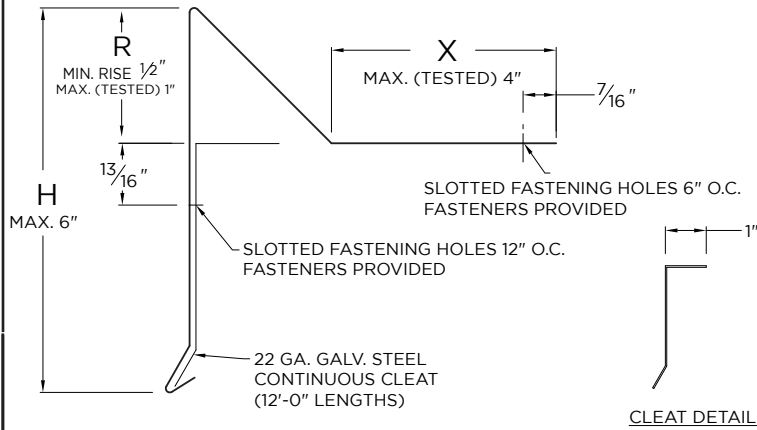

FACE HEIGHT OVER 6"

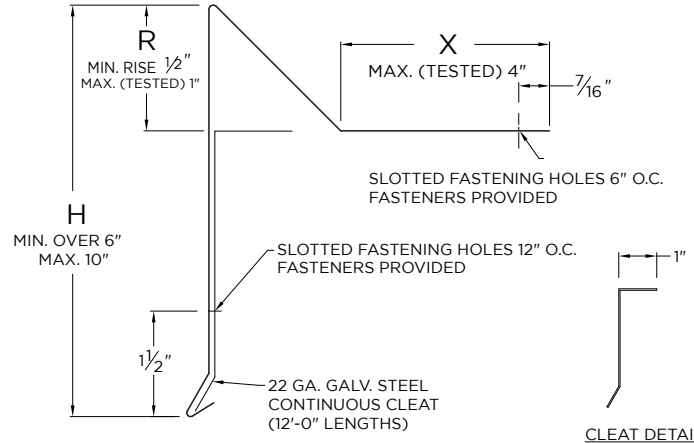

APPROVALS

ANSI/SPRI/FM 4435/ES-1
Test Pressures listed in notes

DIMENSIONS

- _____ (H) Face Height
 _____ (X) Flange Size
 _____ (R) Rise

MATERIAL

- 24 ga. Galv Steel TPO Coated
Color: White
Substrate: Wood
If substrate is not given, wood fasteners will be provided. Masonry
 Metal

QUANTITIES

- _____ Lineal Feet (12'-0" Lengths)
 _____ Outside Miter (90°)
 _____ Inside Miter (90°)

PROJECT INFO

Project Name: _____
 Architect: _____
 Roofing Contractor: _____

Project Type:

By selecting this box you have verified and confirmed that dimensions, sizes, and quantities are correct. All products will be installed in strict accordance with printed instructions.

Date: _____

Mule-Hide Products
 1195 Prince Hall Drive
 Beloit, WI 53511
 800-786-1492
 www.mulehide.com
To submit a quote request, please contact your local TM or email mhquotes@metalera.com.

SHT# _____ of _____
 DATE: **03/21/ 24**
 DRN BY: **JJC**
 CKD BY: **MM**
 DWG #: 52010-42319
 REV: **A**