

16-Foot Standard TPO Membrane

Fewer rolls to handle. Fewer seams to weld. Less waste to dispose of.



The Right Choice for Low-Slope Roofing Products

800-786-1492 • mulehide.com

Rugged • Time-Tested • Weather-Tested

With wider 16-foot Standard TPO membranes from Mule-Hide Products Co., crews are more efficient and jobs simply get done faster. Ideally suited to larger roofs with few penetrations and obstructions, 16-foot Standard TPO significantly reduces labor costs on fully-adhered and induction welded TPO systems.

And, of course, the reinforced membranes deliver the unmatched combination of weathertight performance, durability, energy efficiency and affordability that Mule-Hide Products TPO systems are known for.

Faster, Easier Loading and Staging

Wider rolls dramatically streamline the upfront work of loading materials onto the roof. There are fewer rolls to hoist up to the rooftop. There is less maneuvering of cranes – an often time-consuming task. Disruption to normal building operations is minimized. Crews can more quickly get on to the business of installing the new roof.

More Coverage Per Roll


A 16' x 100' roll covers 60% more roof area than the familiar 10' x 100' roll. That means 40% fewer rolls to move into place, kick out and align before they can be installed ... and the potential for increased savings in crew hours and labor costs.

Fewer Seams

More coverage per roll also means far fewer seams to complete – more than 25% fewer than with a 10' x 100' roll. Crews spend far less time welding, probing and inspecting seams. There are fewer T-patches to install. Projects are finished faster.

Less Waste


With fewer rolls required to complete the job, there is less packaging and core waste to dispose of at clean-up time. Easier, more efficient and better for the environment.

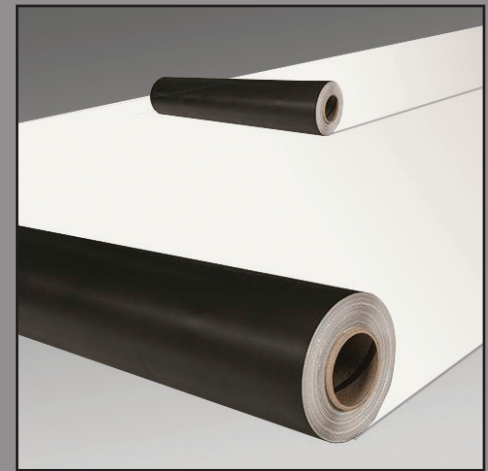

ROOFTOP USAGE

Example: 50,000 Sq. Ft.

□ LINEAR FEET OF SEAMS
■ NUMBER OF ROLLS

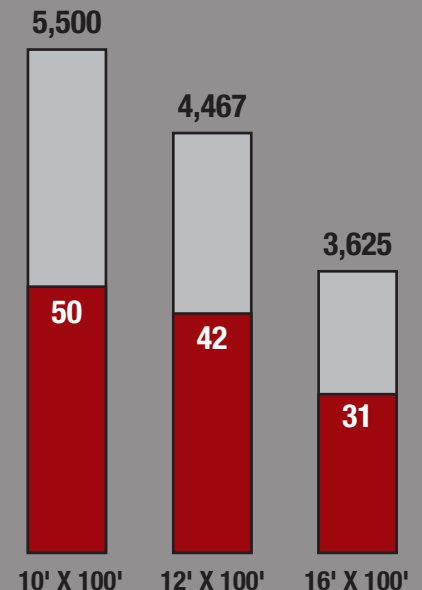

16-Foot Standard TPO Membrane

Fewer rolls to handle. Fewer seams to weld. Less waste to dispose of.



Mule-Hide Products Quality

Mule-Hide Products TPO membranes deliver an exceptional combination of energy efficiency, long-lasting performance and affordability. They are reinforced to easily handle building thermal expansion and contraction. They are lightweight but highly resistant to tears, impact damage, punctures and wind uplift. White membranes provide industry-leading single-ply membrane reflectivity to deliver long-term reductions in cooling costs.

Helpful Tips for Easy Jobsite Unloading and Staging

Unloading

- 16-foot rolls are 2-packed for easy stacking, storage and trucking, as well as more efficient jobsite loading.
- Whenever possible, load 2-packs directly from the truck onto the roof before unpacking them.
- If using a forklift or lull, unload from the side.
- If loading/unloading from the ends, use a carpet pole or long forks (6 feet or longer).
- Avoid using short forks (4 feet or shorter).

On the Roof

- Load rolls so that each 2-pack is close to where the rolls will eventually be installed.
- Use 4-wheel carts, roll movers or insulation fork carts with large wheels to easily move rolls long distances across the roof when necessary.
- Move single rolls by rolling them across the roof.
- To easily turn or spin rolls, roll them onto a scrap piece of poly ISO insulation.



Roll Weight Comparison ... Lighter Than You Would Expect

16' x 100' TPO	Weight	Comparison Product	Weight
45-mil	478 lbs.	10' x 100' 60-mil PVC	448 lbs.
60-mil	520 lbs.	12' x 100' 115-mil fleece backed TPO	496 lbs.
80-mil	730 lbs.	20' x 100' 60-mil EPDM	784 lbs.

The information herein should not be considered all-inclusive and should always be accompanied by a review of the Mule-Hide specifications and guidelines and good application practices.

This information herein is based upon data and knowledge considered to be true and accurate at the time of printing and is provided for the reader's consideration, investigation and verification. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. Mule-Hide Products Co., Inc. does not warrant any results to be obtained. Statements concerning possible use of Mule-Hide products are made without knowledge of your particular roof and such an application may not be fit for your particular purpose. MULE-HIDE DISCLAIMS ALL WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, except written warranties attached to Mule-Hide products and written warranties signed by an officer of Mule-Hide.

Visit the Mule-Hide website at www.mulehide.com prior to any installation for updated technical specifications and details. Mule-Hide is a U.S. registered trademark. All rights reserved. REV 1 2/23