


INDUCTION WELDING
PLATE AND APPROVED
FASTENER CENTERED ON
STRUCTURAL PURLINS.
SPACED 6 INCHES ON
CENTER

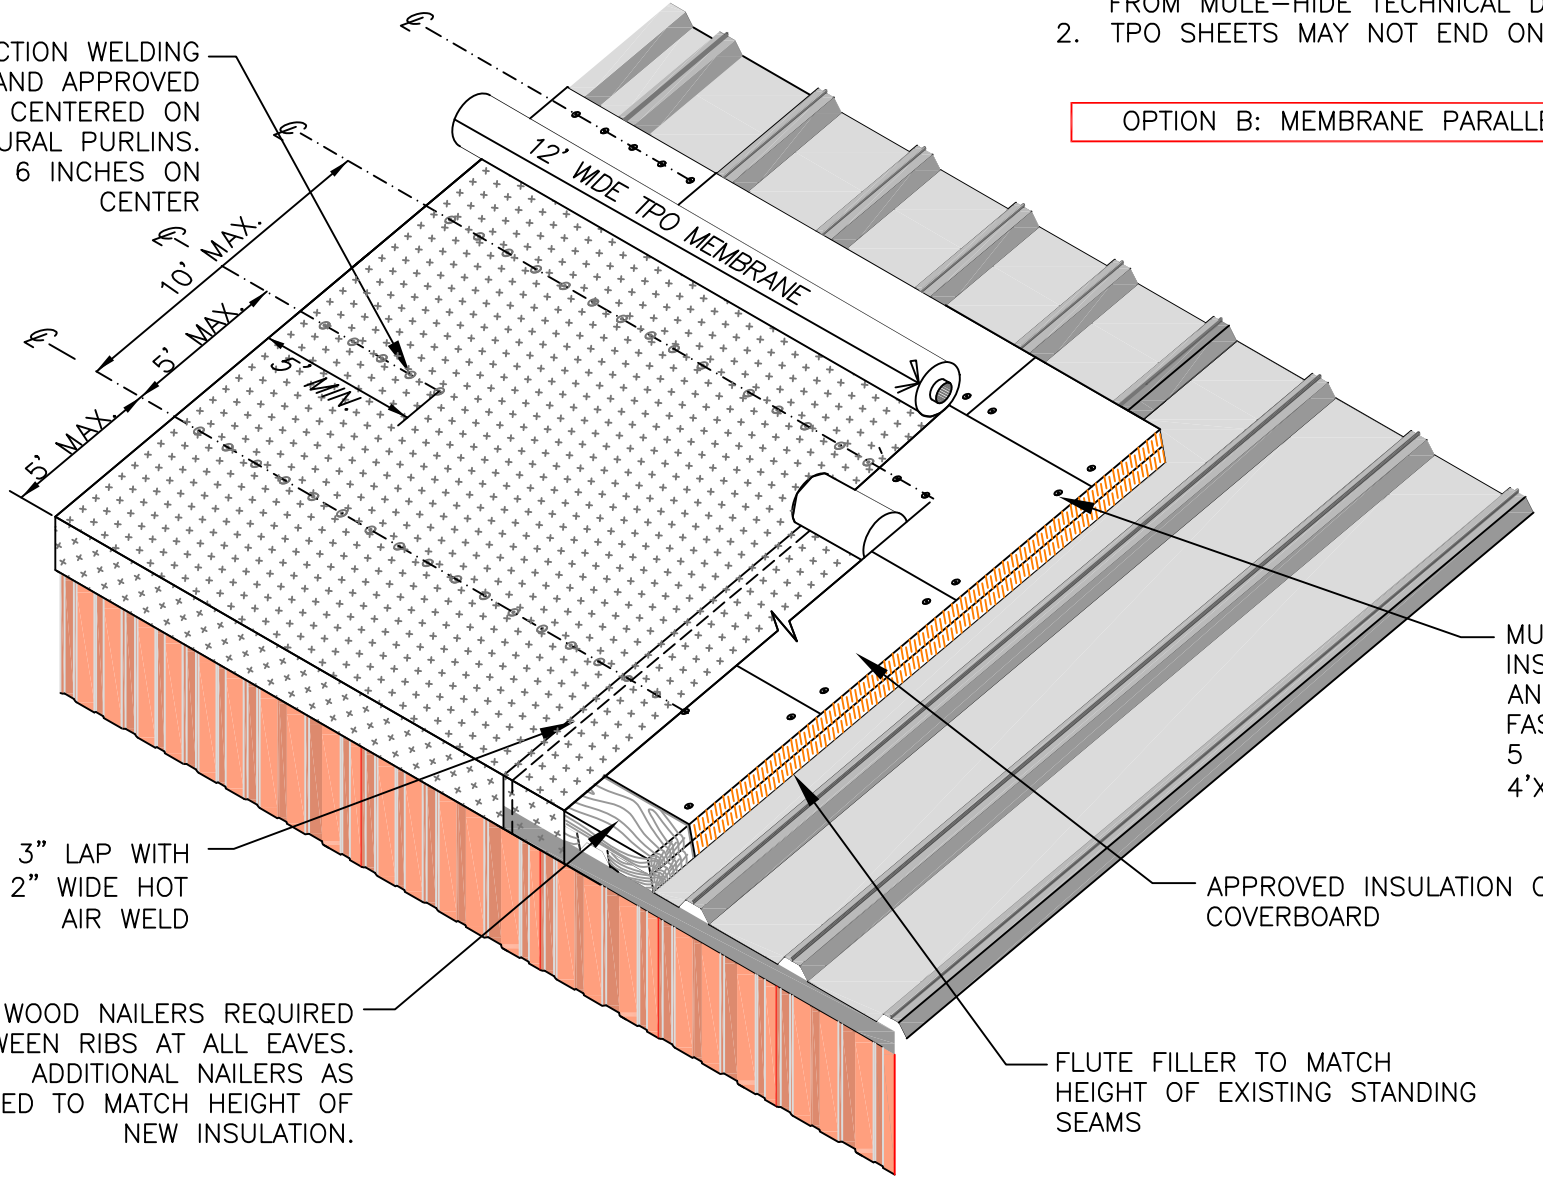

MINIMUM 3" LAP WITH
MINIMUM 2" WIDE HOT
AIR WELD

WOOD NAILERS REQUIRED
BETWEEN RIBS AT ALL EAVES.
ADDITIONAL NAILERS AS
REQUIRED TO MATCH HEIGHT OF
NEW INSULATION.

NOTES:

1. THIS SYSTEM MUST HAVE WRITTEN APPROVAL FROM MULE-HIDE TECHNICAL DEPARTMENT.
2. TPO SHEETS MAY NOT END ON FASTENER PLATES.

OPTION B: MEMBRANE PARALLEL TO SLOPE

MULE-HIDE 3"
INSULATION PLATE
AND APPROVED
FASTENER -
5 FASTENERS PER
4'X8' BOARD

APPROVED INSULATION OR
COVERBOARD

FLUTE FILLER TO MATCH
HEIGHT OF EXISTING STANDING
SEAMS

**MULE-HIDE
PRODUCTS CO., INC.**

**INDUCTION WELDING PLATES
WIND ZONES 100 MPH OR LESS
SYSTEMS:
METAL RETROFIT
TPO/PVC MECHANICALLY FASTENED**

DETAIL NO.:
MMRR-302RT
REVISION DATE: 05/2020