

1 PLY INSTALLATION (WITH NAIL BASE)

NOTES:

1. AN AREA DIVIDER IS A RAISED DOUBLE WOOD MEMBER THAT IS PROPERLY ANCHORED TO THE ROOF DECK. AREA DIVIDERS SHOULD NEVER RESTRICT THE FLOW OF WATER.
2. FLASHING REQUIREMENTS TYPICAL FOR BOTH SIDES OF THE AREA DIVIDER.
3. REFER TO THE SHEET METAL SECTION OF THE NRCA ROOFING AND WATERPROOFING MANUAL FOR JOINERY AND SECUREMENT OPTIONS FOR SHEET METAL.

FLASHING MAY BE SET IN A BED OF M-H MOD BIT FLASHING ADHESIVE OR HOT AIR WELDED. THE 4" TURN-UP OF THE CAP SHEET MUST BE SOFTENED WITH HOT AIR TO EXPOSE ASPHALT OR COATED WITH M-H MOD BIT FLASHING ADHESIVE PRIOR TO THE APPLICATION OF THE CAP SHEET FLASHING MATERIAL.

COVERBOARD/OVERLAY OR INSULATION

INSULATION

8" [200 mm] MINIMUM FLASHING HEIGHT ON LOW SIDE

6" MIN.

BASE SHEET ATTACHMENT 8" O.C.

CAP SHEET ATTACHMENT 12" O.C. MAX.

4" MIN.

SHEET METAL AREA DIVIDER COVER


GASKETED FASTENERS

MULE-HIDE SA-SBS CAP SHEET OR SA-APP CAP SHEET

M-H NAIL BASE MECHANICALLY ATTACHED

ROOF DECK

WOOD NAILERS

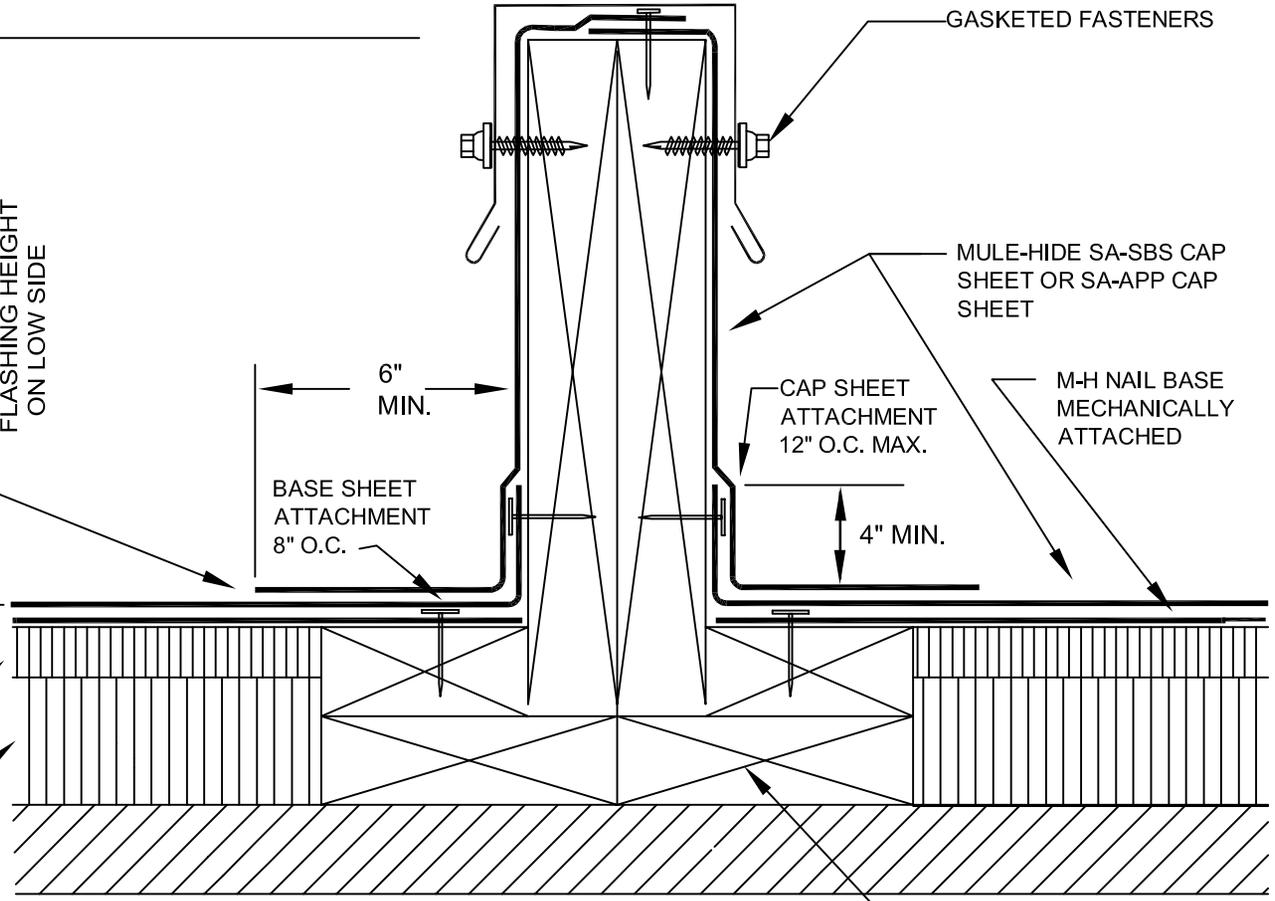

**MULE-HIDE
PRODUCTS CO.,INC.
2003**

**BASE FLASHING - AREA DIVIDER
OPTION 2**

SELF-ADHERING MOD BIT SYSTEMS

**DETAIL NO.:
MH-MB-AD2**