



Product Data Sheet

LWG FASTENERS

PRODUCT DESCRIPTION

Revision Date: October 29, 2018

Mule-Hide's LWG Fasteners are engineered to secure insulation, cover boards and base sheets to lightweight insulating concrete (LWIC) and gypsum decks. The LWG Fastener features an exclusive thread design engineered for exceptional pullout. When used in conjunction with our LWG 3" Metal Plate, multiple fasteners can be installed to achieve the required minimum pullout.




APPROPRIATE ACCESSORIES

LWG 3" Metal Plates are designed to be used with LWG Fasteners.

MATERIAL SPECIFICATIONS

Property	Standard	Average Ultimate Value
Wire:	----	SAE C1022, heat treated
Coating:	----	Tru-Kote™ Epoxy E-Coat
Corrosion Resistance	FM 4470, DIN 50018	<15% Red Rust after 30 cycles
Tensile Strength	ASTM F606-10	2000 lbf.
Shear Strength	AISI S904	1,357 lbf.

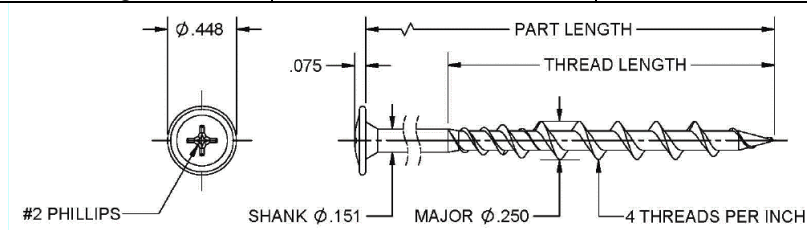

PRODUCT SELECTION

Part Length		Thread Length		Pkg. Qty.	Pkg. Wt.
2-1/4"	57.2 mm	2.125" (full)	54.0 mm	1000/Bkt.	19.0 lbs
3-1/4"	82.55 mm	2.125" (full)	54.0 mm	1000/Bkt.	20.0 lbs
4-1/4"	107.5 mm	2.125" (full)	54.0 mm	1000/Bkt.	33.0 lbs

PERFORMANCE DATA

Substrate	Average Ultimate Pullout
Aggregate Lightweight Insulating Concrete (LWIC) (63 pcf density, 370 psi compressive strength)	190 lbs (one fastener per plate)
Cellular Lightweight Insulating Concrete (LWIC) (41 pcf density, 290 psi compressive strength)	320 lbs (one fastener per plate)
Gypsum (93 pcf density, 340 psi compressive strength)	350 lbs (one fastener per plate)

INSTALLATION GUIDELINES

For LWIC Decks (Aggregate & Cellular) and Gypsum Decks: Using the #2 Phillips drive bit provided and a 0-1500 rpm variable speed screw gun with adjustable torque control, install the LWG Fastener and LWG 3" Metal Plate through the substrate and into the approved deck. The LWG Fastener shall penetrate the approved deck a minimum of 2". Care should be taken to orient the LWG Fastener perpendicular to the deck and not to overdrive the LWG Fastener to prevent damage to the insulation, cover board or base sheet. Care should also be taken to avoid stripping out the LWG Fastener by over driving the LWG Fastener into the LWIC or Gypsum deck.

LWG FASTENERS

DISCLAIMER

The performance specifications published in this Mule-Hide Product Data Sheet are based on controlled laboratory tests and are intended as a guideline only. They are not guaranteed in any way by Mule-Hide Products Co., Inc. or its supplier, since the building design, engineering and construction (including workmanship and materials) are beyond our control. Mule-Hide recommends that fastener pull tests be conducted to verify the substrate provides adequate pullout resistance.

PROTECTION & SAFETY

Mule-Hide maintains Safety Data Sheets on all of its non-exempt products. Safety Data Sheets contain health and safety information for your development of appropriate product handling procedures to protect your employees and customers. Mule-Hide Safety Data Sheets should be read and understood by all of your supervisory personnel and employees before using Mule-Hide products in your facilities.

ADDITIONAL INFORMATION

The information given on this PDS is subject to change without notice. Always check the Mule-Hide website at www.mulehide.com for the latest information, changes and updates or contact Mule-Hide Products Company at 800-786-1492.

DISCLAIMER

The statements provided concerning the material shown are intended as a guide for material usage and are believed to be true and accurate at the time of printing. No statement made by anyone may supersede this information, except when done in writing by Mule-Hide Products Co., Inc. Since the manner of use is beyond our control, Mule-Hide does not authorize anyone to make any warranty of merchantability or fitness for any particular purpose or any other warranty, guarantee or representation, expressed or implied, concerning this material. Buyer and user accept the product under these conditions and assume the risk of any failure, any injury person or property (including that of the user), loss or liability resulting from the handling, storage or use of the product whether or not it is handled, stored or used in accordance with the directions or specifications. Mule-Hide must be notified in writing of any claims and be given the opportunity to inspect the alleged failure before repairs are made.