



**Description:**

Mule-Hide Metals Downspouts are available with an open or closed face. Both open and closed face downspouts are available in standard 10' lengths.

- Custom sizes and assemblies are available.
- A- and B-Style Elbows, Square-To-Round Adaptors, and Drop/Outlets available.

**Open-Face Downspouts**

- Help eliminate blockage due to ice and debris build-up.
- Will nest together by cutting a 1" notch out of each side of the receiving piece.

**Closed-Face Downspouts**

- Standard 24-gauge downspouts feature a Pittsburgh seam for a professional finish that also eliminates the need for rivets.
- Tapered ends nest together up to 3" and eliminate field notching and crimping.

Contact Mule-Hide to request a color chart, samples and information regarding custom metals and finishes.

**Energy Efficiency:**

LEED® and ENERGY STAR® compliant; 100% recyclable.

**Installation:**


1. Install in accordance with Mule-Hide Detail MHSM-2080.
2. Any deviation from the requirements set forth in the detail drawings must be pre-approved, in writing, by the Mule-Hide Technical Department.

**Warranty:**

Mule-Hide metal accessories are eligible for warranty coverage when properly installed as part of a Standard or Premium warrantable system. Please visit our Web site or call us for more information.


**Technical Services:**

Product samples, detail sheets, color chips, and color chart are available for your submittal package. For assistance with questions or submittals, contact your local representative or call Mule-Hide.

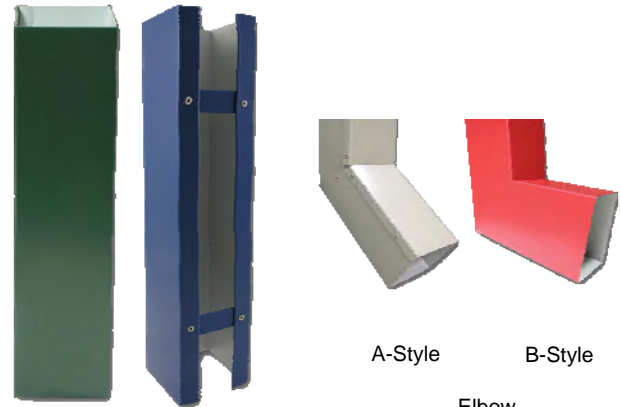

Closed-Face    Open-Face  
Downspout

A-Style    B-Style  
Elbow

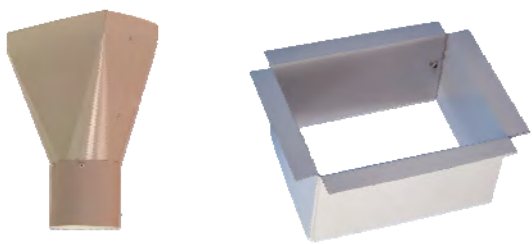

Square-To-Round  
Adaptor

Drop/Outlet



*Note: The quantity and size of the downspout is the responsibility of the contractor or design professional.*

Material	Gauge	Finish
Aluminum	.040	Mill or Kynar®
Stainless Steel	24-gauge	N/A
Bonderized Steel	24-gauge	N/A
Galvalume	24-gauge	Mill or Kynar®
Copper	16 oz.	Mill