


Summary Specification

"The name trusted in roofing since 1906"



APP TORCH

12 – Year Material Warranty Non-Insulated Nailable Deck

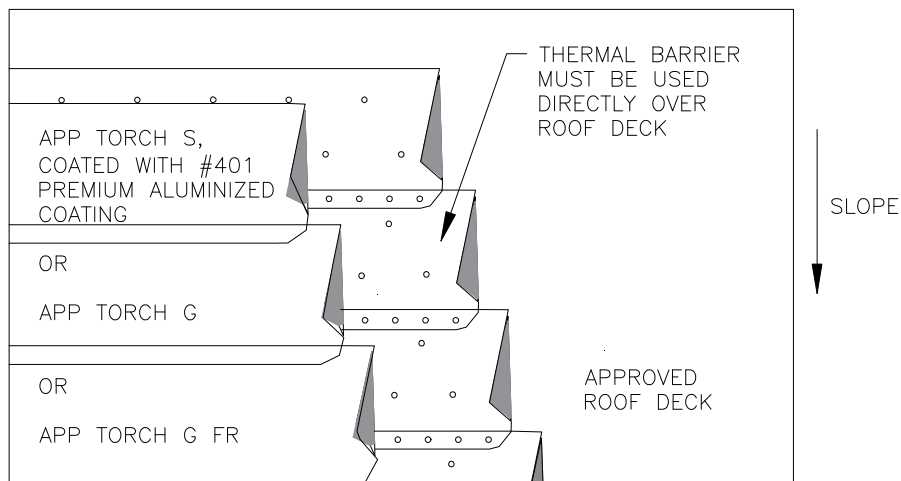

Deck Requirement
• Min. 1/2" Plywood ⁽¹⁾
• Min. 7/16" OSB ⁽¹⁾
• Min. 1" Wood Plank ⁽¹⁾
• Lightweight Insulation Concrete ⁽²⁾
• Gypsum ⁽²⁾
• Cementitious Wood Fiber ⁽²⁾

Insulation
• None

Base Sheet
• None

Slope Requirement
1/4" per foot

Cap Sheet
• APP Torch S
• APP Torch G
• APP Torch G FR
Thermal Barrier
• G2 Base mechanically attached
• Nail Base mechanically attached

Notes:

1. Space below roof deck must be vented if area below roof is conditioned space.
2. Pull out tests are required prior to construction.
3. Flashings are to be one layer of Cap Sheet installed in accordance with Mule-Hide Standard Details.

PRODUCTS NOT SUPPLIED BY MULE-HIDE PRODUCTS ARE NOT COVERED UNDER THE MULE-HIDE WARRANTY

PLEASE CONSULT THE MULE-HIDE WEBSITE FOR THE MOST CURRENT INFORMATION AT WWW.MULEHIDE.COM