
# **Summary Specification**

"The name trusted in roofing since 1906"

### **APP TORCH**



### 15 – Year Material or System Warranty Non-Insulated Nailable Deck

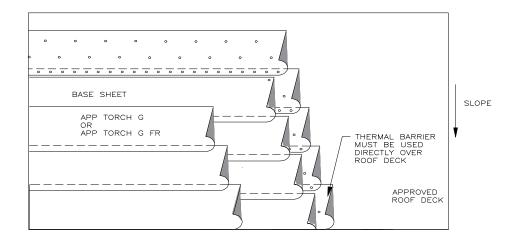

Deck Requirement	Ins
• Min 15/32" • Plywood <sup>(1)</sup>	None
• Min 7/16" OSB <sup>(1)</sup>	
• Min. 1" Wood Plank <sup>(1)</sup>	Base
<ul> <li>Lightweight</li> <li>Insulation Concrete over Metal<sup>(2)</sup></li> </ul>	APP Torc
• Gypsum <sup>(2)</sup>	• SA Base <sup>(</sup>
Cementitious     Wood Fiber <sup>(2)</sup>	SA Base

	Insulation	
Nono		

#### e Sheet<sup>(4)</sup>

- ch Base
- (3)
- **F**R<sup>(3)</sup>

APP Torch G

APP Torch G FR

•

Cap Sheet

Cover Board
Min. ¼" Dens Deck
Primo

Min. ¼" Securock •

#### **Thermal Barrier**

- G2 Base
- mechanically attached
- Nail Base mechanically •
- attached

Slope Requirement	
1/4" per foot	

## **Summary Specification**

"The name trusted in roofing since 1906"



Notes:

- 1. Space below roof deck must be vented if area below roof is conditioned space.
- 2. Pull out tests are required prior to construction.
- 3. If SA Base is used, ambient temperatures must be 50° F and rising.
- 4. One interply of approved Base Sheet is required.
- 5. Flashings are to be one layer of Cap Sheet installed in accordance with Mule-Hide Standard Details.

#### PRODUCTS NOT SUPPLIED BY MULE-HIDE PRODUCTS ARE NOT COVERED UNDER THE MULE-HIDE WARRANTY

#### PLEASE CONSULT THE MULE-HIDE WEBSITE FOR THE MOST CURRENT INFORMATION AT WWW.MULEHIDE.COM