

ANY STANDARD
MULE-HIDE TERMINATION

TPO STANDARD REINFORCED MEMBRANE FULLY
ADHERED WITH APPROVED BONDING ADHESIVE –
THICKNESS TO MATCH THICKNESS OF FLEECE
BACK

CREASE MEMBRANE AT ANGLE CHANGE
TO LIMIT BRIDGING TO $\frac{3}{4}$ " MAX

MH 2.4" SEAM PLATES AND HDP
OR EHD FASTENERS, MAXIMUM
12" O.C. (SEE NOTE 1)

MINIMUM 1-1/2" HOT AIR WELD AND CUT
EDGE SEALANT AS REQUIRED


TPO FLEECEBACK MEMBRANE –
TURN UP WALL 3"

APPROVED INSULATION

3"

NOTES:

1. CONTACT MULE-HIDE FOR FASTENING CRITERIA AND PROPER FASTENERS FOR EACH DECK TYPE.
2. RUSS PRODUCTS CANNOT BE USED ON FLEECEBACK MEMBRANES.

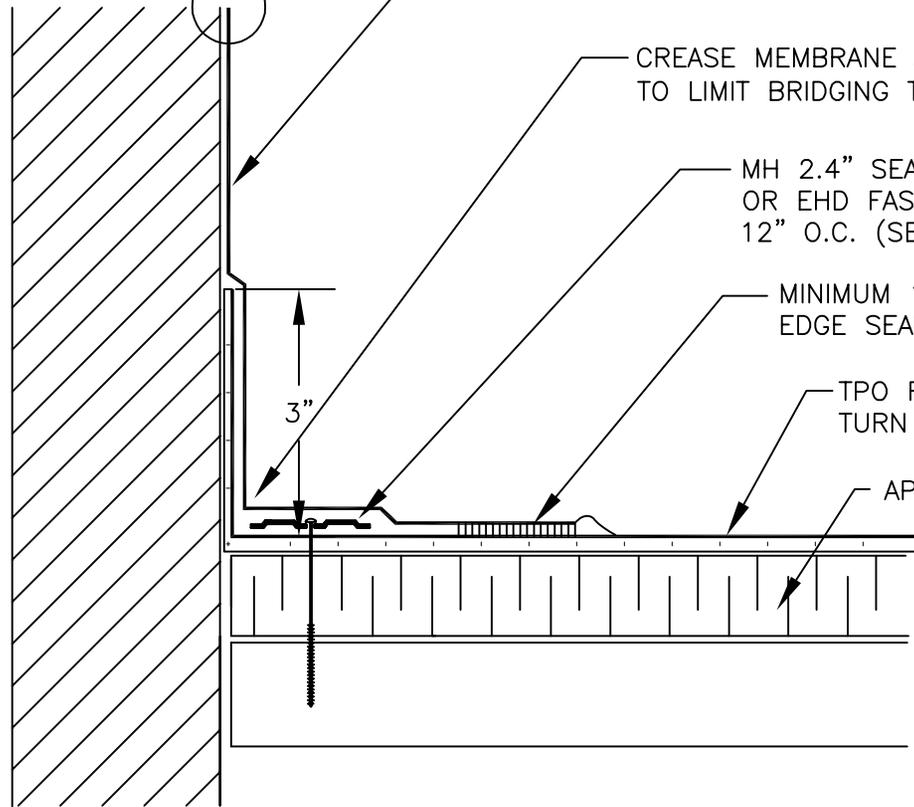

**MULE-HIDE
PRODUCTS CO., INC.**

BASE ATTACHMENT

**SYSTEMS:
TPO FLEECE BACK
SYSTEMS ONLY**

DETAIL NO.:

MHT-FA-305D

REVISION DATE: 05/2016