


2-PIECE REGLET


NOTE:
SCREWS THROUGH
COUNTERFLASHING TO
ACT AS TERMINATION
ARE NOT APPROVED



REGLET

NOTES:

1. REFER TO SPECIFICATIONS FOR FLASHING MEMBRANE REQUIREMENTS.
2. LAPS IN FLASHING MUST BE OFFSET FROM LAPS IN FIELD SHEET.
3. CAP SHEET MUST BE HEATED AND GRANULES EMBEDDED IN SURFACE AT ALL LAPS OVER GRANULATED SURFACES WHEN INSTALLING THE CAP SHEET.
4. MAXIMUM FLASHING HEIGHT FOR APP MODIFIED BITUMEN FLASHINGS IS 36". IF WALL IS TALLER THAN 36", SEE DETAIL MHMB-UN-CW06T

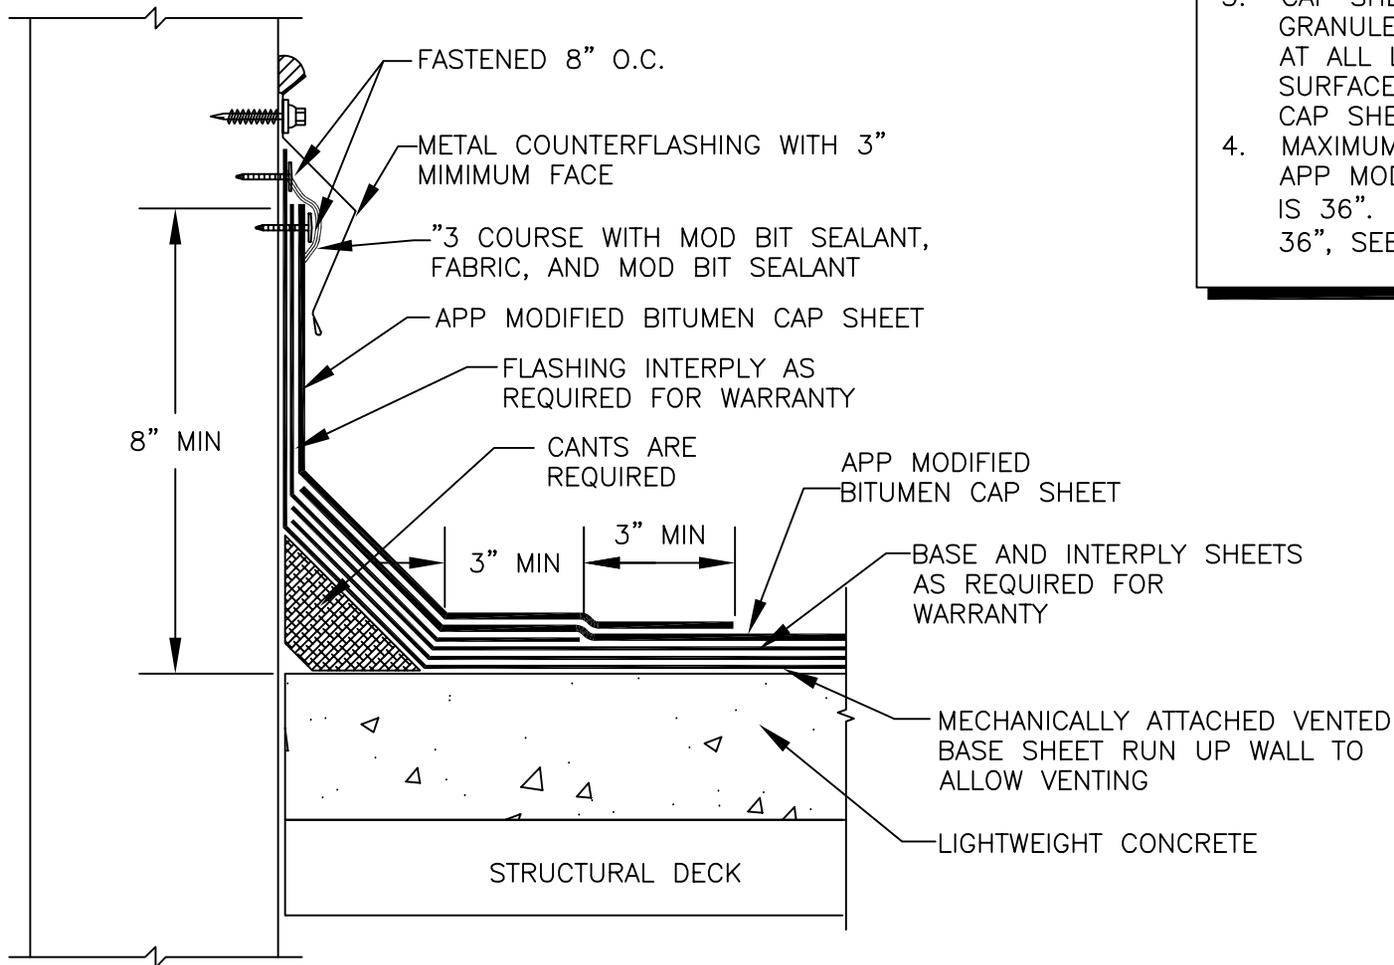

**MULE-HIDE
PRODUCTS CO., INC.**

**BASE FLASHING
FOR VENTED PERIMETER
SYSTEMS:
APP MODIFIED BITUMEN**

DETAIL NO.:
MHMB-UN-CW04T

REVISION DATE: MARCH 2015