


NOTES:

1. ATTACH WOOD NAILER TO WALL/DECK IN ACCORDANCE WITH FMRC GUIDELINES PER SECTION 1-28, REGARDING WIND LOADS TO ROOF SYSTEMS & DECK SECUREMENT.
2. WOOD BLOCKING MAY BE SLOTTED FOR VENTING OF WET-FILL DECKS OR OTHER APPLICABLE CONSTRUCTIONS.
3. THIS DETAIL SHOULD BE USED ONLY WHERE THE DECK IS SUPPORTED BY THE OUTSIDE WALL.
4. REFER SMACNA RECOMMENDATIONS & DETAILS REGARDING METAL THICKNESS & CLEAT REQUIREMENTS.
5. MEMBRANE ENDLAPS MUST BE 6" MINIMUM & FULLY ADHERED TO THE MEMBRANE AT ALL LOCATIONS WHERE "FASTLAP" IS NOT PRESENT.

* CONTINUOUS CLEAT IS RECOMMENDED TO BE AT LEAST ONE GAUGE HEAVIER THAN EDGE FLASHING METAL.

SHEET METAL EDGE FLASHING
PRIME METAL FLANGE BEFORE STRIPPING (REQUIRED),
WITH MULE-HIDE # 121 ASPHALT PRIMER OR FAST DRY
PRIMER IN AEROSOL CAN MEETING ASTM D 41.

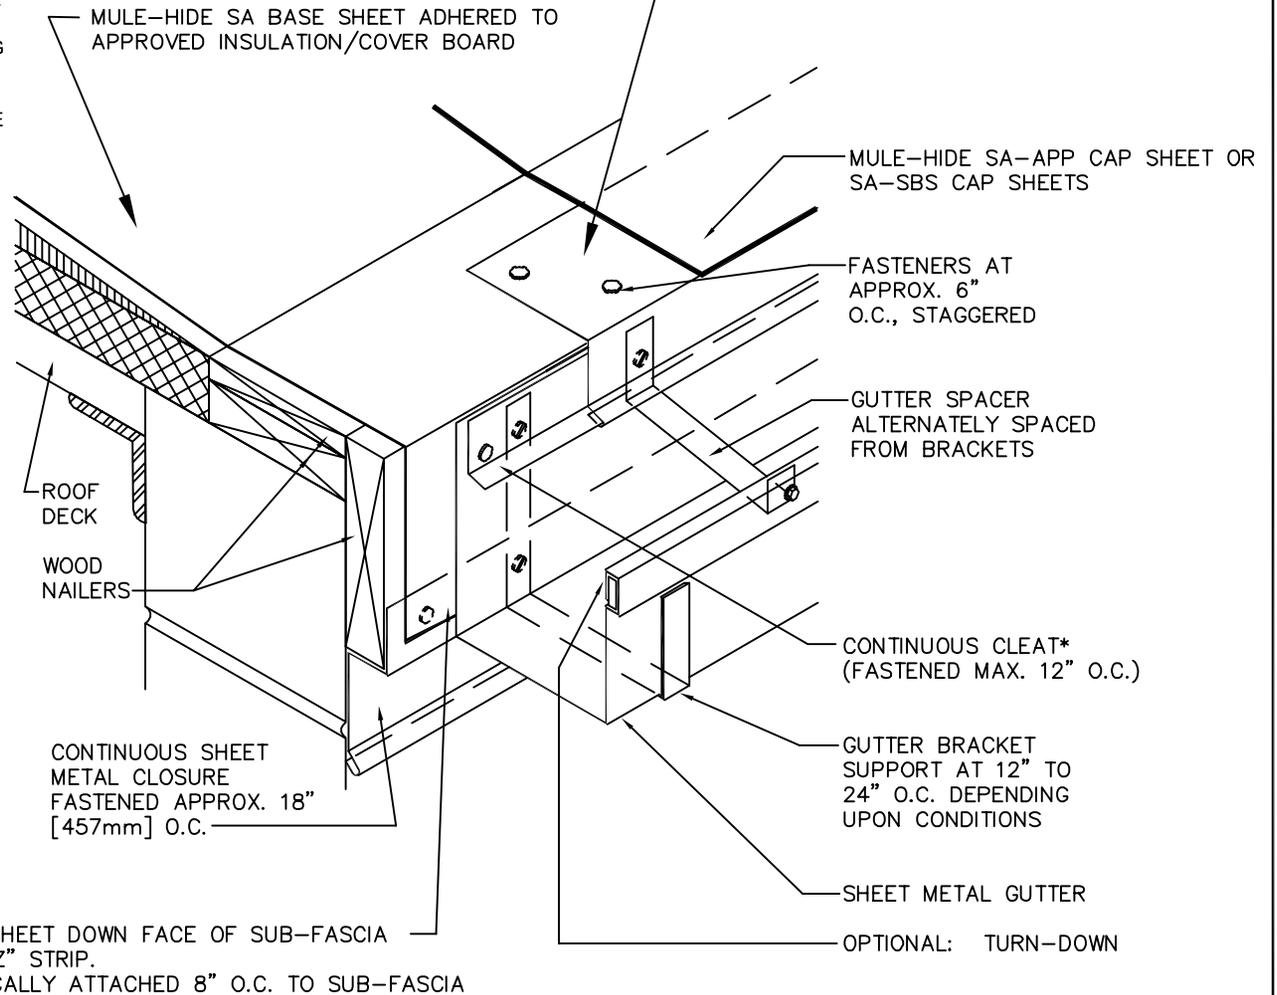

EXTEND SA BASE SHEET DOWN FACE OF SUB-FASCIA
TO COVER METAL "Z" STRIP.
"Z" STRIP MECHANICALLY ATTACHED 8" O.C. TO SUB-FASCIA

**MULE-HIDE
PRODUCTS CO.,INC.
2003**

GUTTER DETAIL - OPTION 1

SELF-ADHERING MOD BIT SYSTEMS

**DETAIL NO.:
MH-MB-G1**