


NOTES:

1. ALL FIELD SEAMS MUST BE 6" WIDE.
2. A MINIMUM OF 1 FULL WIDTH PERIMETER SHEET MUST BE USED.
3. ALL FIELD SHEETS MUST BE ATTACHED 12" O.C. MAX.
4. THE 9" RMS STRIP MUST BE CENTERED UNDER THE PERIMETER SHEET AND RUN PARALLEL WITH THE EDGE OF THE ROOF. ATTACHMENT OF THE RMS MUST NOT EXCEED 12" O.C.

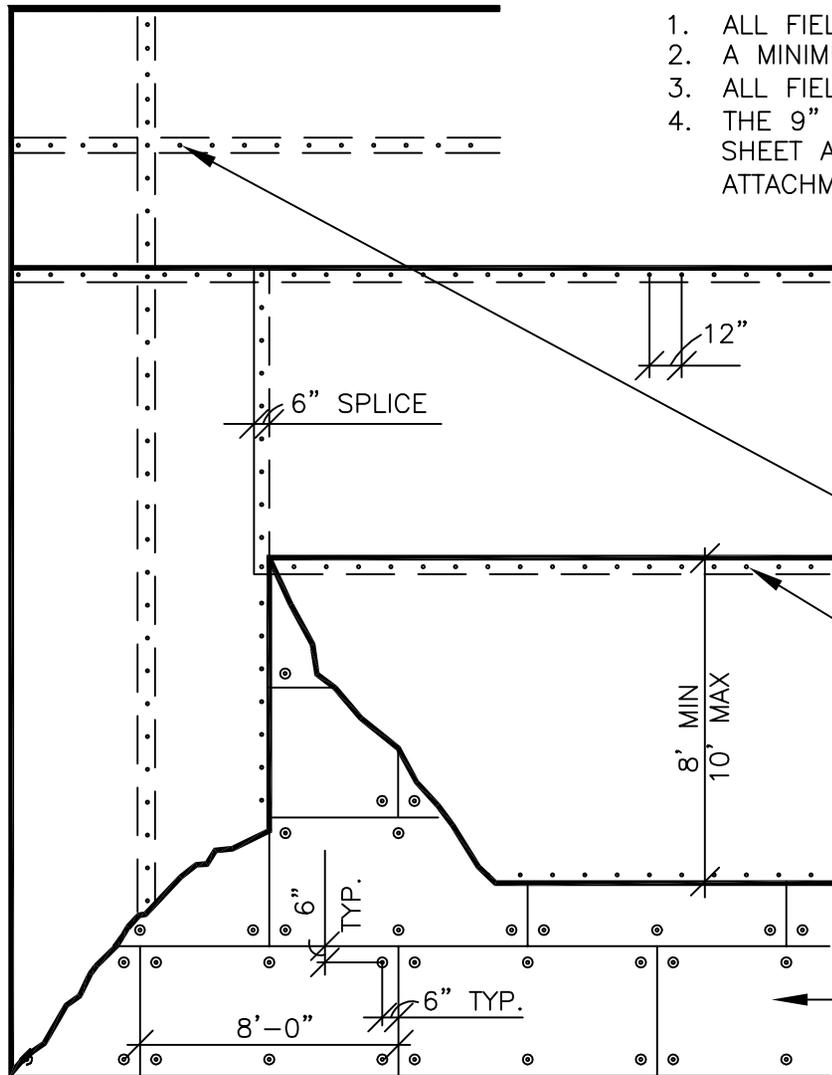

NOTE:

6" RMS OR 6" RMS WITH TAPE IS NOT APPROVED FOR THIS DETAIL.

9" RMS STRIP FASTENED A MAXIMUM OF 12" O.C.

MH 2.4" SEAM PLATE AND HD FASTENERS 12" O.C. MAX

4' X 8' INSULATION WITH 6 FASTENERS PER SHEET (MH INSULATION OR APPROVED COMPATIBLE INSULATION)

**MULE-HIDE  
PRODUCTS CO., INC.**

**PERIMETER ENHANCEMENT  
FULL SHEET WITH 9" RMS  
SYSTEMS:  
MECHANICALLY ATTACHED**

**DETAIL NO.:**  
**MHE-192**

REVISION DATE: 11/2014