


NOTES:

1. POSITION SEAM PLATES 1/2" TO 1" FROM EDGE OF DECK MEMBRANE.
2. APPROXIMATELY 1/8" DIAMETER BEAD OF CUT-EDGE SEALANT IS REQUIRED ON CUT EDGES OF TPO REINFORCED MEMBRANE.
3. SLEEPER HEIGHT SHOULD BE SUFFICIENT TO ELEVATE THE EQUIPMENT SUPPORT BRACKET ABOVE THE WATER LINE.
4. SLEEPER SHALL BE FULLY FLASHED TO COMPLETELY SEAL SLEEPER

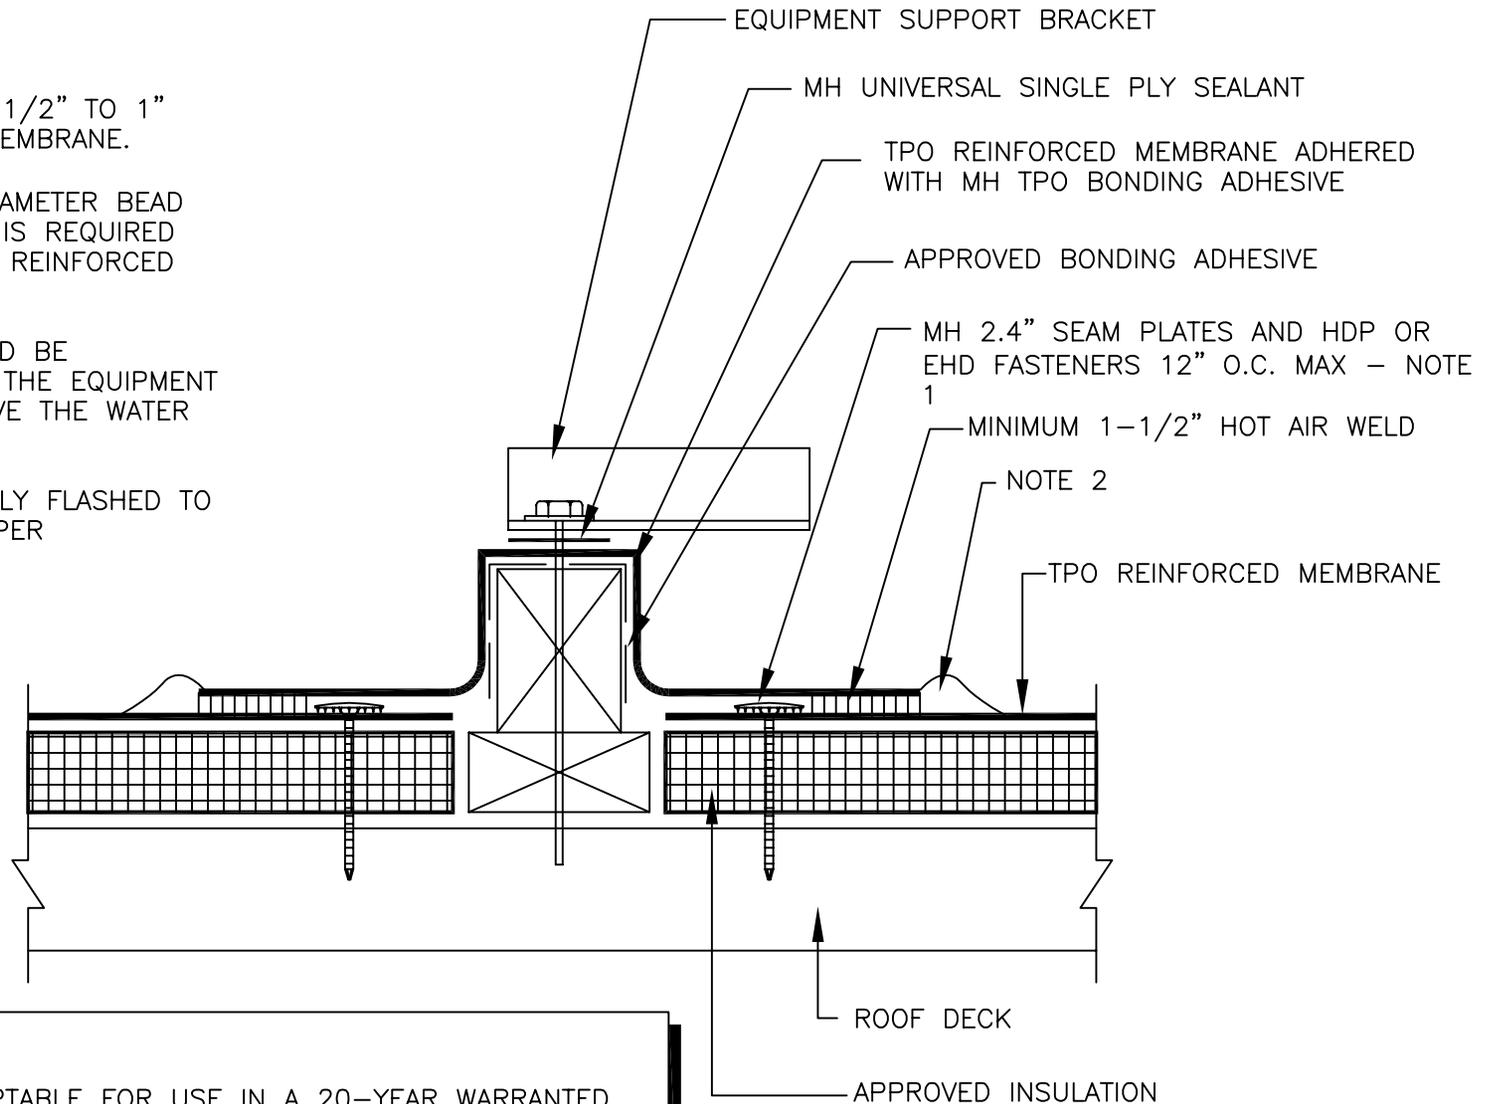

NOTE:

THIS DETAIL IS NOT ACCEPTABLE FOR USE IN A 20-YEAR WARRANTED SYSTEM.

FOR A 20-YEAR WARRANTED SYSTEM INSTALL UNIT ON RAISED PLATFORM WITH SUPPORTS FLASHED AS SHOWN IN DETAIL MHT-UN-521C.

**MULE-HIDE  
PRODUCTS CO., INC.**

**FIXED EQUIPMENT SUPPORT**

**SYSTEMS:  
ALL TPO SYSTEMS**

**DETAIL NO.:**

**MHT-UN-531**

REVISION DATE: 10/2013