


NOTES:

1. REFER TO SPECIFICATIONS FOR FLASHING MEMBRANE REQUIREMENTS.
2. TEMPERATURE OF METAL SLEEVE MUST NOT EXCEED 160° F.
3. CAP SHEET MUST BE HEATED AND GRANULES EMBEDDED IN SURFACE AT ALL LAPS OVER GRANULATED SURFACES WHEN INSTALLING THE CAP SHEET.

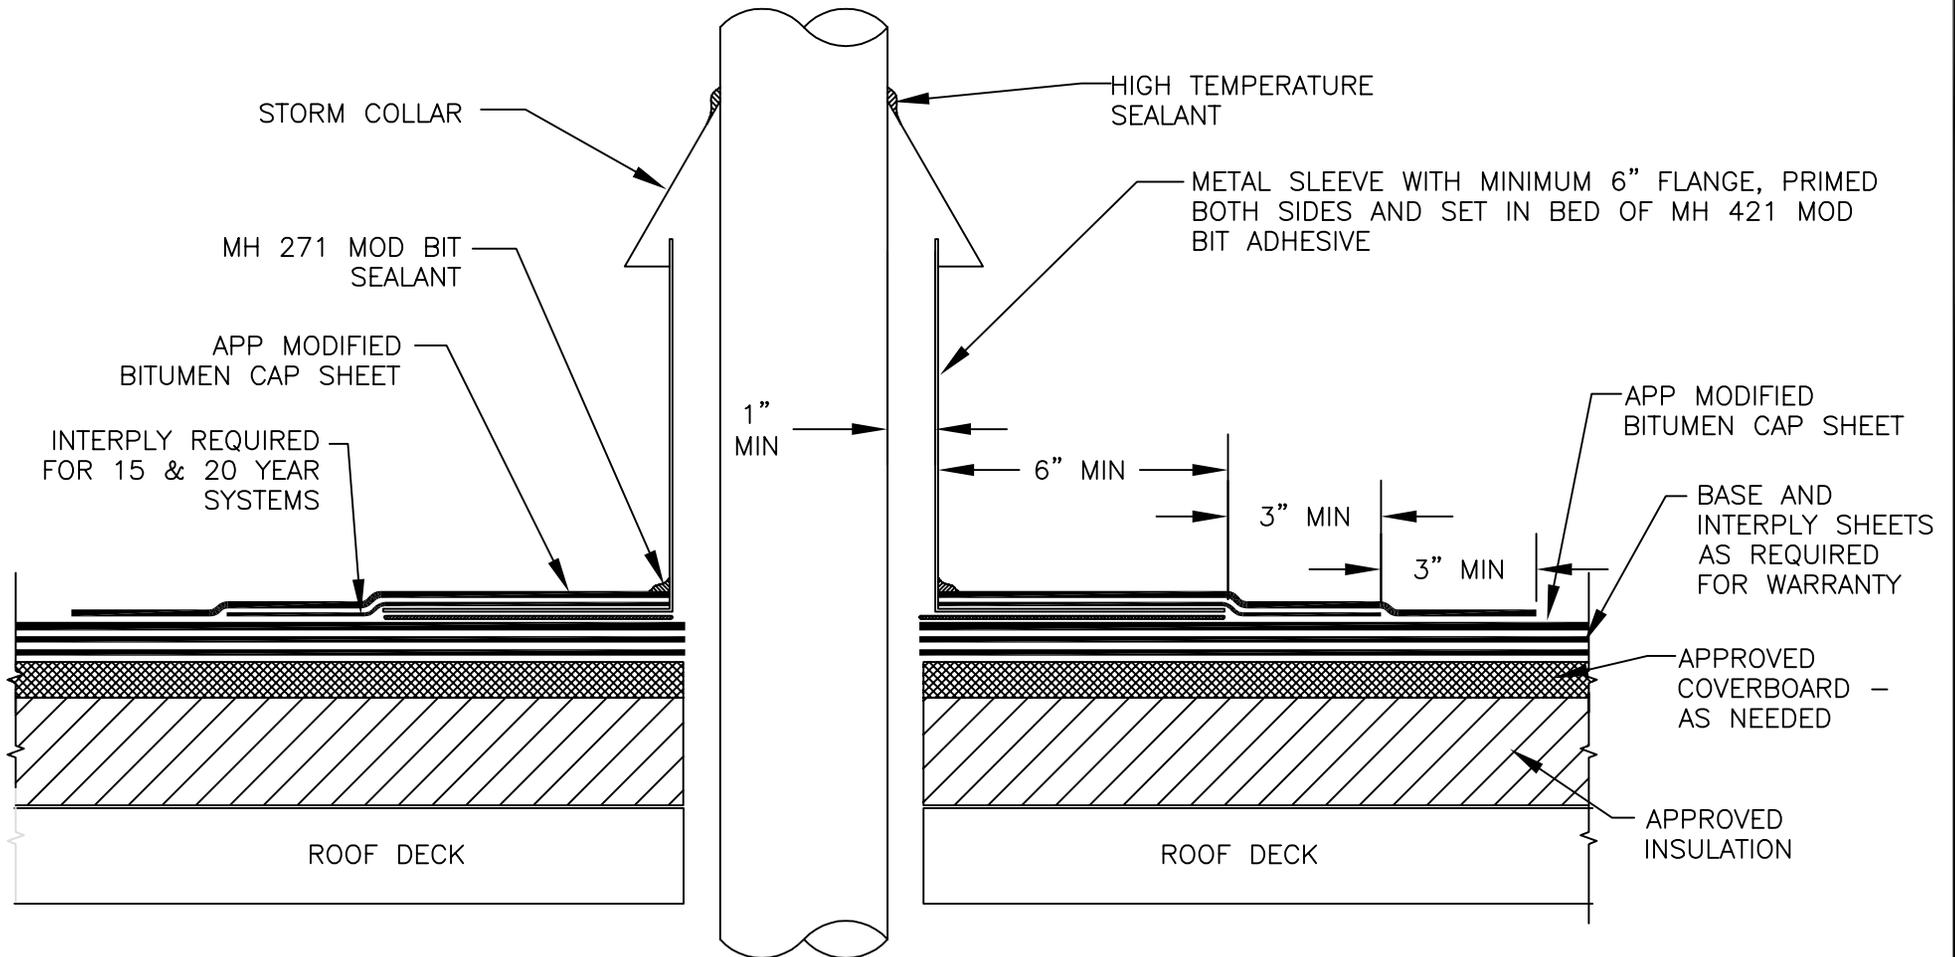

**MULE-HIDE
PRODUCTS CO., INC.**

HOT STACK

SYSTEMS:

APP MODIFIED BITUMEN

DETAIL NO.:

MHMB-UN-PP02T

REVISION DATE: MARCH 2015