


VERTICAL SEAM (1-1/2" OVERLAP) IS HOT AIR WELDED.
 SA CAP SHEET USED TO WRAP PIPE
 MATERIAL TO TURN OUT 1" ONTO FIELD SHEET

FLASHING MATERIAL IS WELDED TO THE FIELD WITH
 A HOT AIR WELDING TOOL OR SET IN A BED OF
 MULE-HIDE MOD BIT FLASHING ADHESIVE

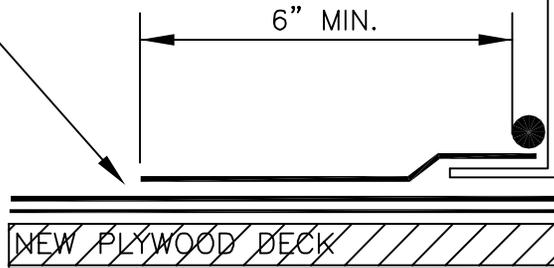

EXPOSED SEALANT AND ADHESIVE
 SHOULD BE COVERED WITH LOOSE
 GRANULES

NEW APPROVED INSULATION OR OVERLAY MAY
 BE INSTALLED OVER THE WOOD DECK AND MUST
 BE MECHANICALLY ATTACHED USING APPROVED
 FASTENERS AND FASTENING PATTERNS SPECIFICALLY
 APPROVED FOR THE MATERIAL SELECTED

MULE-HIDE SELF-ADHERING CAP SHEET
 MULE-HIDE SA BASE SHEET
 OR MULE-HIDE NAIL BASE

MULE-HIDE MOD BIT
 SEALANT

MULE-HIDE SA CAP
 SHEET FLASHING MATERIAL
 TURNED OUT 1" ON TO
 ROOF SURFACE

MULE-HIDE SA CAP
 SHEET FLASHING
 MATERIAL



NEW PLYWOOD DOES NOT REQUIRE PRIMING. AGED
 WOOD MUST BE PRIMED WITH MULE-HIDE # 121
 ASPHALT PRIMER. IF ADHERING ONLY ONE PLY OF CAP
 SHEET DIRECTLY TO THE WOOD DECK, IT IS
 RECOMMENDED THAT ALL JOINTS IN THE PLYWOOD BE
 COVERED WITH DUCTAPE.

MULE-HIDE
PRODUCTS CO.,INC.
2003

PIPE FLASHING - OPTION 3

SELF-ADHERING MOD BIT SYSTEMS

DETAIL NO.:
MH-MB-P3