


PERIMETER EDGE METAL SHALL BE PRIMED WITH MULE-HIDE # 121 ASPHALT PRIMER OR FAST DRY PRIMER IN AEROSOL CAN MEETING ASTM D 41.

FASTENERS AT APPROX. 3" to 6" [75 to 150 mm] O.C., STAGGER

MULE-HIDE SA BASE SHEET INSTALLED ADHESIVE SIDE UP. REMOVE RELEASE LINER AFTER ATTACHING METAL. STAGGER NAILING PATTERN OF SHEET. 8" STAGGER IN EACH DIRECTION WITH 8" SPACING.

MULE-HIDE SA-SBS OR SA-APP CAP SHEET

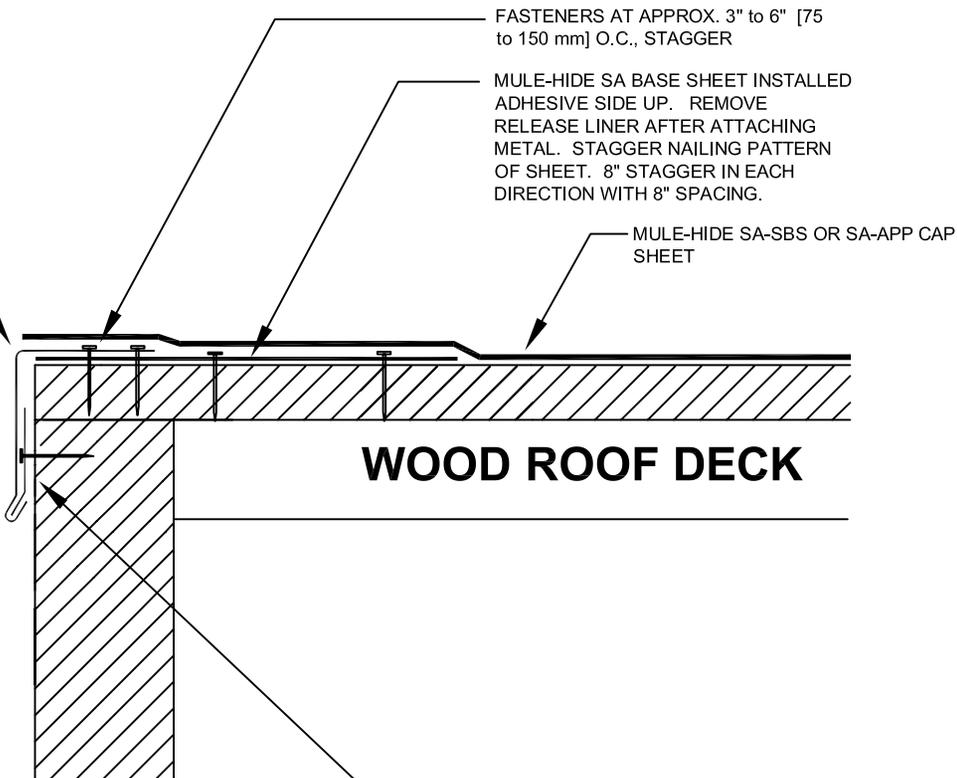

WOOD ROOF DECK

CONTINUOUS CLEAT FASTENED PER TABLE 1.

NOTES:

1. THIS DETAIL SHOULD BE USED ONLY WHERE THE DECK IS SUPPORTED BY THE OUTSIDE WALL.
2. REFER TO THE SHEET METAL SECTION OF THE NRCA ROOFING AND WATERPROOFING MANUAL FOR JOINERY AND SECUREMENT OPTIONS FOR SHEET METAL.
3. REFER TO THE SHEET METAL SECTION OF THE NRCA ROOFING AND WATERPROOFING MANUAL FOR JOINERY AND SECUREMENT OPTIONS FOR SHEET METAL.
4. THIS DETAIL IS ONLY AVAILABLE FOR PROJECTS REQUESTING TEN-YEAR MATERIAL OR SYSTEM WARRANTIES.
5. DECK MUST HAVE A MINIMUM SLOPE OF 1/4" PER FOOT.

**MULE-HIDE
PRODUCTS CO.,INC.
2003**

EDGE METAL FLASHING - OPTION 2

SELF-ADHERING MOD BIT SYSTEMS

**DETAIL NO.:
MH-MB-EM2**