


PERIMETER EDGE METAL SHALL BE PRIMED WITH MULE-HIDE # 121 ASPHALT PRIMER OR FAST DRY PRIMER IN AEROSOL CAN MEETING ASTM D 41.

1" [25 mm] MIN. BELOW BLOCKING

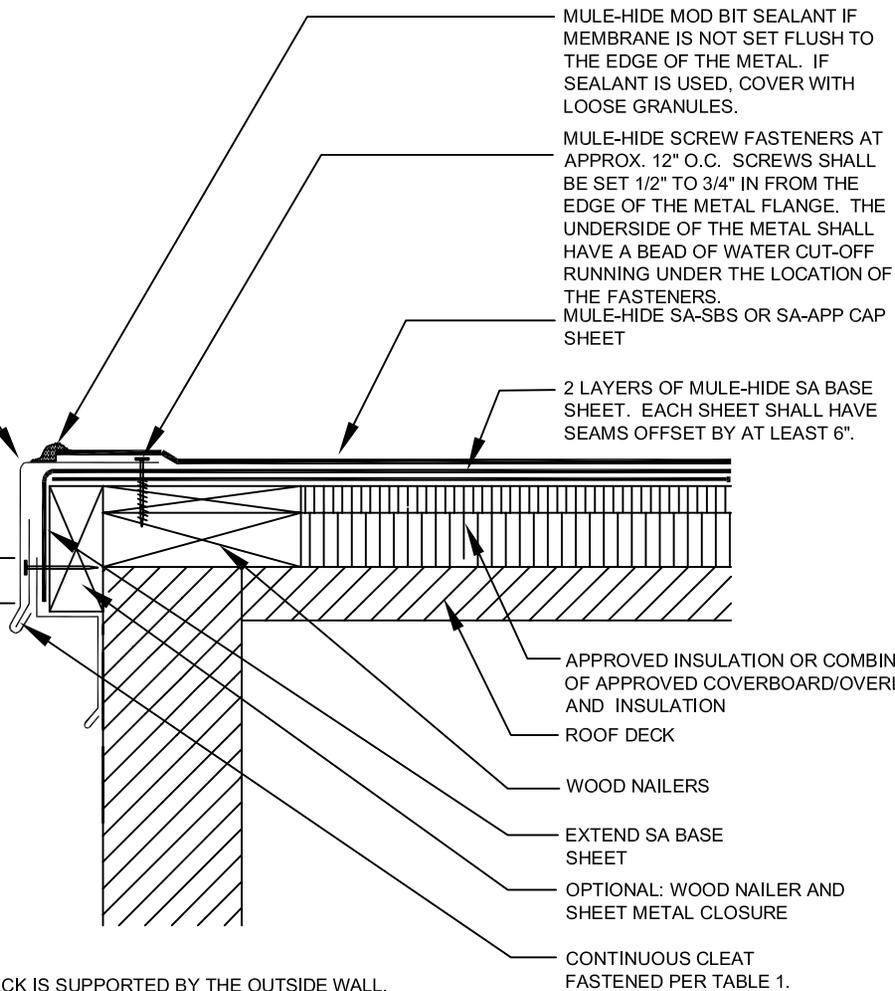

NOTES:

1. THIS DETAIL SHOULD BE USED ONLY WHERE THE DECK IS SUPPORTED BY THE OUTSIDE WALL.
2. REFER TO THE SHEET METAL SECTION OF THE NRCA ROOFING AND WATERPROOFING MANUAL FOR JOINERY AND SECUREMENT OPTIONS FOR SHEET METAL.
3. MULE-HIDE REQUIRES THE USE OF MULE-HIDE SCREWS TO ANCHOR THE EDGE METAL FOR 20-YEAR WARRANTIES.

MULE-HIDE REQUIRES 2 LAYERS OF SA BASE SHEET FOR 20-YEAR WARRANTIES

**MULE-HIDE
PRODUCTS CO.,INC.
2003**

EDGE METAL FLASHING - OPTION 3

SELF-ADHERING MOD BIT SYSTEMS

**DETAIL NO.:
MH-MB-EM3**