


**NOTES:**

1. ATTACH WOOD NAILER TO WALL/DECK IN ACCORDANCE WITH FMRC GUIDELINES AS PER SECTION 1-28, REGARDING WINDLOADS TO ROOF SYSTEMS & DECK SECUREMENT.
2. REFER TO SMACNA RECOMMENDATIONS & DETAILS REGARDING METAL THICKNESS & CLEAT REQUIREMENTS.
3. MEMBRANE ENDLAPS MUST BE 6" MINIMUM & FULLY ADHERED TO MEMBRANE IN ALL LOCATIONS WHERE "FASTLAP" IS NOT PRESENT.
4. ALL ACCEPTABLE MASONRY, CONCRETE, METAL & AGED WOOD SUBSTRATES MUST BE PRIMED WITH MULE-HIDE # 121 ASPHALT PRIMER (ASTM D 41).
5. INSULATION MUST BE ATTACHED IN ACCORDANCE WITH MULE-HIDE MINIMUM REQUIREMENTS.
6. IF INSTALLING A 15-YR SYSTEM, 1 PLY OF SA BASE SHEET IS REQUIRED OVER THE NAIL BASE.
7. IF INSTALLING A 20-YR SYSTEM, 2 PLYS OF SA BASE SHEET ARE REQUIRED OVER THE NAIL BASE.

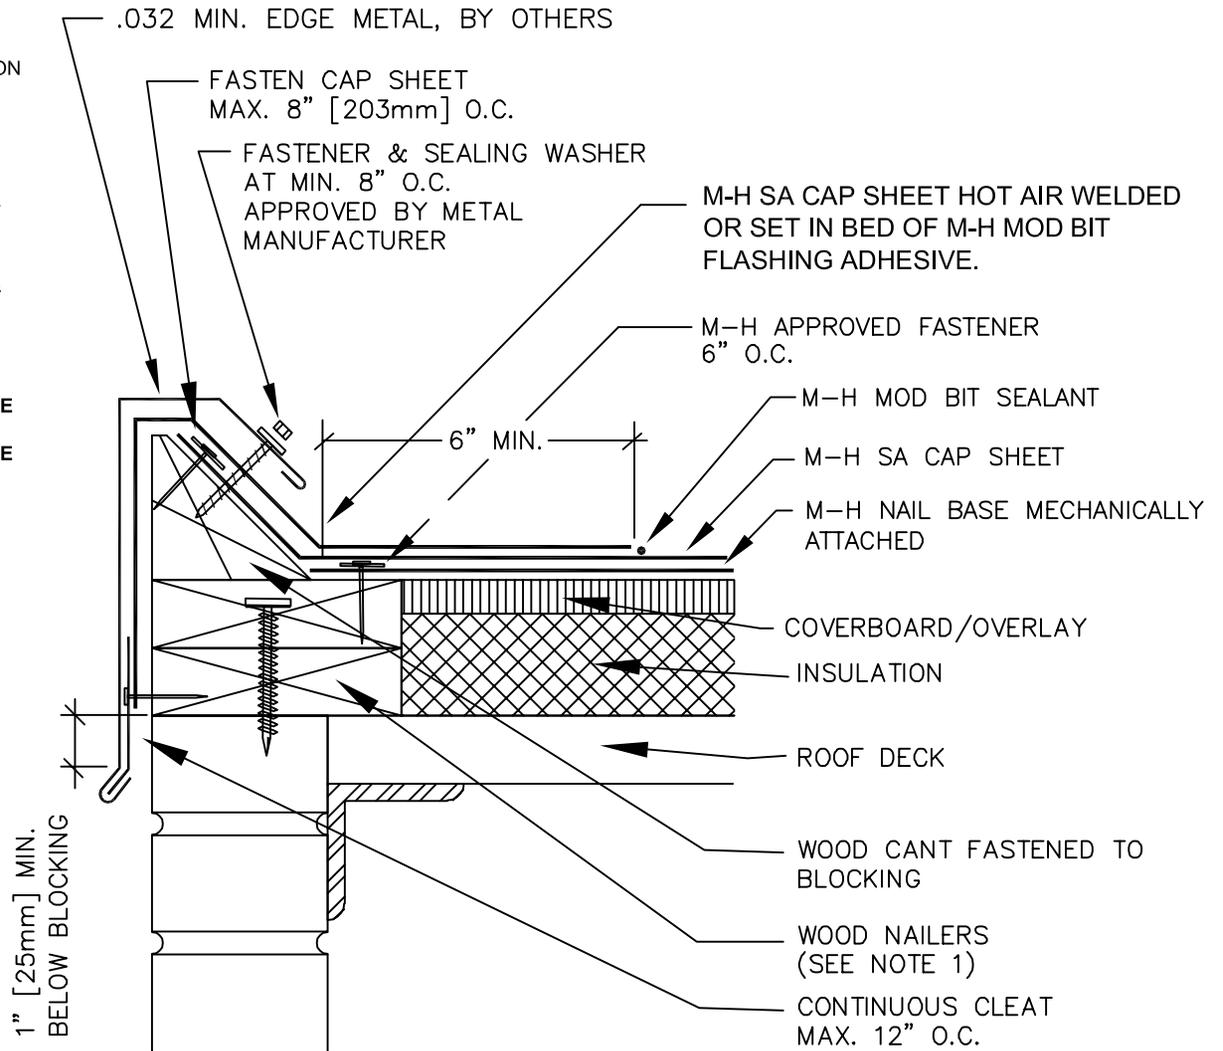

**MULE-HIDE  
PRODUCTS CO.,INC.  
2003**

**GRAVEL STOP - OPTION 2  
SELF-ADHERING MOD BIT SYSTEMS**

**DETAIL NO.:  
MH-MB-GS2**