


PARAPET WALL FLASHING COPING CAP TERMINATION

OUTSIDE FACE OF FLASHINGS MUST BE MECHANICALLY TERMINATED UNDER THE COPING CAP. CONTINUOUS CLEAT FASTENED 12" O.C., MAX, MUST BE USED WHENEVER OUTSIDE FACE DIMENSION IS 4" OR MORE. FASTEN INSIDE FACE OF COPING 24" ON CENTER WITH GROMMETTED FASTENERS.

SA-SBS CAP SHEET
OR SA-APP CAP SHEET

SA-BASE SHEET
AS REQUIRED FOR
WARRANTY

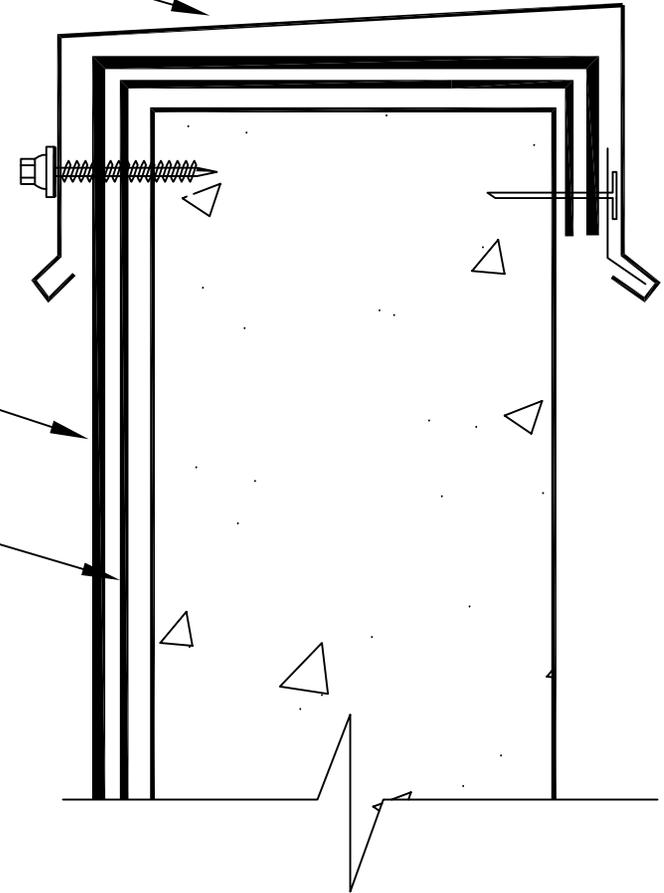

NOTES:

1. VERTICAL SURFACES SUCH AS MASONRY, STUCCO, CONCRETE, AGED WOOD OR METAL SHALL BE PRIMED WITH MULE-HIDE # 121 ASPHALT PRIMER. PRIMER MUST BE THOROUGHLY DRY BEFORE APPLICATION OF SELF-ADHERING MEMBRANES.

**MULE-HIDE
PRODUCTS CO., INC.**
2003

WALL FLASHING TERMINATION - 5

SELF-ADHERING MOD BIT SYSTEMS

DETAIL NO.:
MH-MB-WFT05