

CONCRETE WALKWAY WITH INTERLOCKING PAVERS INSTALLED OVER 60-MIL EPDM OR TPO MEMBRANE TO SEGREGATE GREENGRID® AREA FROM REMAINING ROOF. ADDITIONAL ROW MAY BE REQUIRED TO WIDEN THE AREA, ALSO WHERE ROOF SLOPE CAUSES SLIDING OF PAVERS.

60-MIL EPDM OR TPO MEMBRANE LOOSE LAID


STONE BALLAST TO FILL THE VOIDS IN AN IRREGULAR OR CURVED LAYOUT

GREENGRID® TRAY

GEOTEXTILE FABRIC

PROTECTION FABRIC

MULE-HIDE EPDM OR TPO MEMBRANE - SEE NOTE BELOW

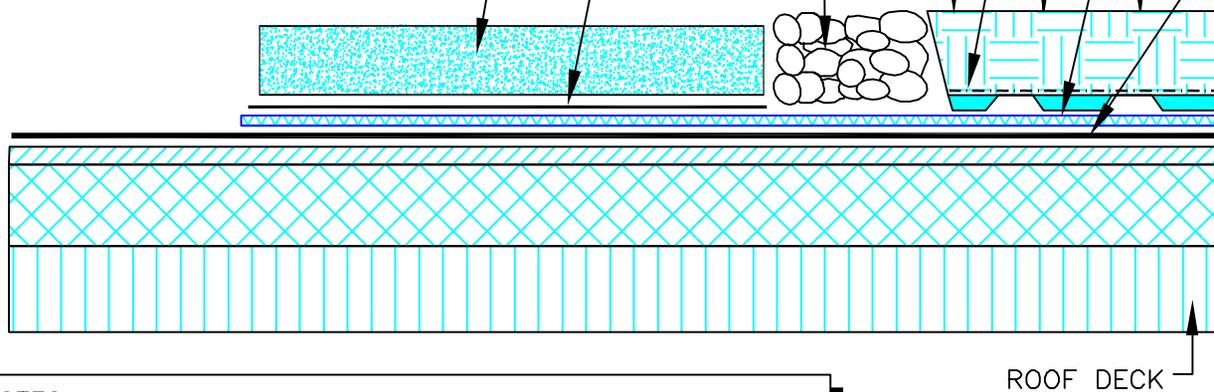

NOTES:

1. MEMBRANE THICKNESS IS DEPENDENT UPON WARRANTY LENGTH. REFER TO LIVING ROOF™ SYSTEM ATTACHMENT II, OR III FOR SPECIFIC REQUIREMENTS.
2. CONSULTANT TO DESIGN A SAFE WALKWAY LOCATION ON THE ROOF.
3. CONSULTANT TO LAYOUT WALKWAY TO AVOID THE EXCESSIVE IMPEDANCE OF WATER FLOW TO DRAINS.

**MULE-HIDE
PRODUCTS CO., INC.**
AUGUST 2008

**SEGREGATION DETAIL: BETWEEN GARDEN &
EXPOSED SINGLE PLY ROOF
SYSTEMS:
LIVING ROOF FEATURING GREENGRID®**

DETAIL NO.:
MHGG-184